

# CHANNEL VISION™

## 6210 Color CAT5 Camera


Channel Vision's 6210 Color CAT5 Camera with audio is designed to mount into a single-gang J-Box or low-voltage ring. Easily connect the 6210 directly to the Channel Vision P-6014 CAT5 Camera Sequencer via its CAT5 output or a standard video system through its BNC output. When used with the P-6014, its loop out connections enable the camera signals to be connected to another device such as a DVR or modulator.

# 6210

Front



Back

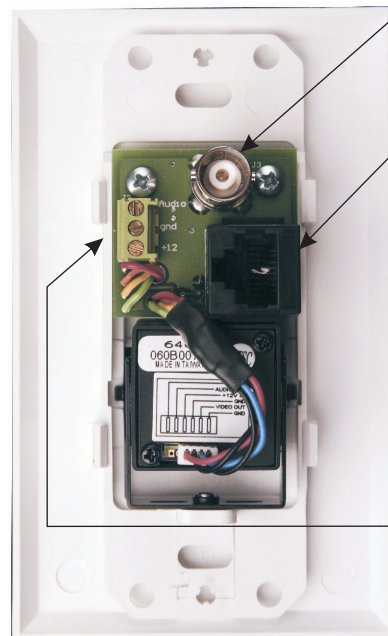

**BNC Video Output...**  
Connect coax here to use as a conventional camera

**RJ-45 Output...**  
Connect CAT5 here to use with P-6014 or 3112

**Camera Power & Audio Out...**  
Audio out from microphone  
Ground (shared)  
+12VDC

### Features:

- BNC & CAT5 output
- Built-in microphone
- Screwless trim plate
- Mounts in a 1-gang box
- Easy-to-install

### \*Specifications: (typical @25° C)

#### 6210 Camera

<b>Lens:</b>	3.8mm
<b>Resolution:</b>	380 lines
<b>S/N Ratio:</b>	More than 48dB
<b>Min Illumination:</b>	0.4 LUX @ F2.0
<b>Power Consumption:</b>	120mA

\*Specifications subject to change without notice.

## CHANNEL VISION™

234 FISCHER AVENUE • COSTA MESA, CA 92626 USA  
(714) 424-6500 □ (800) 840-0288 □ (714) 424-6510 fax  
www.channelvision.com □ email: sales@channelvision.com