

CABLEREADY.

Protective Molding Raceway

www.icmcorp.net

CABLE MOLDING CATALOG



ICMCORP.
INTERNATIONAL COMMUNICATIONS MANUFACTURING CORP.

CABLEREADY

ICM Corporation Recognized Worldwide



ICM Corporation is a privately owned manufacturing company serving the security, cable TV, home entertainment, commercial and broadcast industries. Incorporated in 1985, ICM Corp. is recognized worldwide for our CableReady molding, PowerTronics power supplies, F-Conn compression connectors and Cable Pro compression tools. The tools and connectors utilize our patented 360° compression technology making them the most durable system on the market. Headquartered in Denver, Colorado, USA, ICM Corp. encompasses four divisions that include Cable Pro, compression tools and accessories, CableReady, cable molding, F-Conn Industries, compression connectors, and PowerTronics, power supplies. ICM Corp.'s cable molding, power supplies, compression tools and accessories are manufactured in Denver, Colorado, USA. This allows us to oversee the products from conception, to fabrication and lastly at inspection. We can assure our customers that they are receiving a quality made product built to last.

Visit www.icmcorp.net for detailed information on all ICM Corp. products.



ICM Corp. utilizes a proprietary roll form machine to produce exact sizes of cable molding.



The punch out machine creates custom formed accessories that include corners, tee fitting's and outlet boxes.

Revolutionizing The Cable Molding Industry



CABLEREADY offers a series of protective molding developed to meet the needs of the ever-changing cabling industry.


In response to industry demands and with many years of multi-unit construction experience, CABLEREADY designers were able to develop a protective molding raceway that not only meets but exceeds the cable industry's standards. CABLEREADY has since been an industry leader in developing the most innovative solutions to the challenges that installers must face when working with cable molding. CABLEREADY molding is available in straight run, transitions, right angles, Tee Fittings, and much more to ensure a professional solution to any installation.

Our molding is made of 26 gauge Galvalume® steel. Galvalume® lasts longer and is far more durable than G90 hot dipped steel or plastic molding systems. All products can be used for indoor and outdoor applications.

In the past, system operators, installers and apartment owners have settled for plastic moldings that were difficult to install, re-enter and re-install with an effective product life of only two to three years. Users have had to put up with plastic moldings that would crack, shift, discolor, warp and literally falloff the walls of buildings.

All products are guaranteed against cracking, warping, discoloring, blistering or peeling due to ultraviolet rays or harsh weather conditions for 15 years.

CableReady's unique molding holds these US patented numbers: 5,523,529, 5,732,747 and 6,437,247

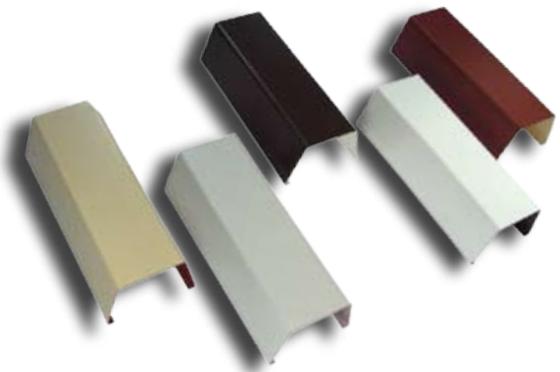

CABLEREADY'S

Table of Contents

Molding Colors.....	5
Straight Run Molding.....	6
Molding Specifications.....	7
Cable Capacity.....	8
Straight Run Mounting Clips.....	9
High Security Full Backing Plates.....	10
Cove Molding.....	11
1/2" Fittings.....	12-13
3/4" Fittings.....	14-15
1" Fittings.....	16-17
2" Fittings.....	18-19
Mounting Boxes.....	20
Tools.....	21-22
Paint and Caulk.....	23
Anchors.....	24-26
Quick Installation Guide.....	27
Helpful Hints.....	28-29
Proprietary Process.....	30



CABLEREADY

A Division of ICM Corp.
 6260 Downing Street Denver, CO 80216
 Tel: 1-800-222-2142 or 303-288-8107
 FAX: 303-288-4769
 Email: sales@icmcorp.net
 www.icmcorp.net



CABLEREADY'S

Molding Colors



ORDERING GUIDE

*Use two letter suffix to designate color when ordering:

IV	Ivory	BR	Brown
RW	Redwood	LG	Light Gray
WH	White	DG	Dark Gray**

Example: **SR050WH** = 1/2" x 8' White Molding

** Dark Gray in limited quantities

CABLEREADY'S

Straight Run Molding

STRAIGHT RUN

Molding Specifications

FEATURES:

- All molding is available in five colors and four sizes
- We offer transitions between sizes
- Can be applied for interior or exterior use
- Greater cable capacity
- 15 year warranty!



1/2" x 8' Molding
Part #SR050*
480 ft./box



3/4" x 8' Molding
Part #SR075*
160 ft./box




1" x 8' Molding
Part #SR100*
80 ft./box




2" x 8' Molding
Part #SR200*
96 ft./box

- Straight Run must be ordered by box quantity




1/2" MOLDING

Part No.	A	B	C
SR050	7/16"	1/2"	5/8"



3/4", 1", 2" MOLDING

Part No.	A	B	C
SR075	3/4"	3/4"	1 1/2"
SR100	1"	1"	2 1/8"
SR200	2"	2"	3 1/4"

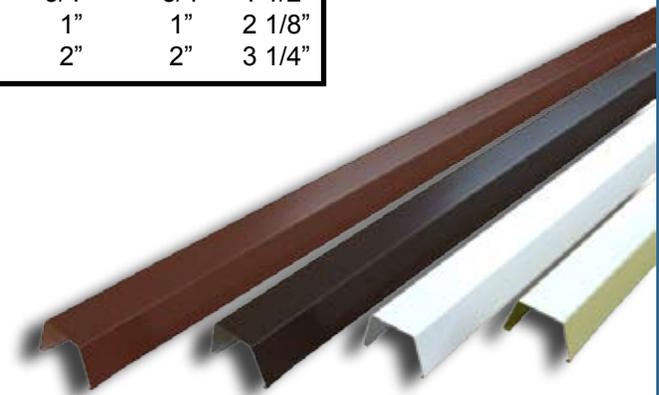

ORDERING GUIDE

*Use two letter suffix to designate color when ordering:

IV	Ivory	BR	Brown
RW	Redwood	LG	Light Gray
WH	White	DG	Dark Gray**

Example: **SR050WH** = 1/2" x 8' White Molding

** Dark Gray in limited quantities

CABLEREADY'S

Cable Capacity

SR050

2 RG-6's



SR075

4-6 RG-6's



SR100

14-16 RG-6's



SR200

40 RG-6's



STRAIGHT RUN

Standard Mounting Clips

Application: Mounting clips are attached to the surface every 4', all cables or wires are then tie wrapped to the clip and secured.



1/2" CLIP
Part #CL050



3/4" CLIP
Part #CL075



1" CLIP
Part #CL100



2" CLIP
Part #CL200

Part No.	Cable Capacity	Footage Per Box	Shipping Weight Per Box
SR050	2 RG-6's	480'	55 lbs.
SR075	4-6 RG-6's	160'	28 lbs.
SR100	14-16 RG-6's	80'	22 lbs.
SR200	40 RG-6's	96'	40 lbs.

• Molding cable capacities are approximations using 60% braided RG6 cable



An easy formula for determining the number of clips needed is to multiply the footage of straight run by .25 for each size ordered.

Example: 4000' of SR100IV x .25 = 1000 CL100

HIGH SECURITY

Full Backing Plates

Cove Molding

Application: Used in areas where high security is required or when surfaces are uneven or unsupported. The full backing plate provides the ultimate in security for wires. Backing plates are ordered in the same lengths and quantities as straight run.

FEATURES:

- 26 gauge Galvalume® steel
- Class “A” fire rating
- Available in five colors
- 15 year warranty!
- Holds up to 24 series 6 drops
- Permanent Installation



3/4" X 8' SECURITY CLIP
Part #BP075GS
240 ft./box



1" X 8' SECURITY CLIP
Part #BP100GS
192 ft./box



2" X 8' SECURITY CLIP
Part #BP200GS
128 ft./box

- Backing Plate must be ordered in box quantity



3 1/2" COVE MOLDING
Part #CM350*
80 ft./box



3 1/2" COVE MOLDING CLIP
Part #CMC350

HELPFUL HINTS

All molding and fittings are shipped with a blue protective film. It is recommended that the film remains on the product until the molding is installed on the clips. Note: Fittings should have the film removed prior to installation.

Pictorial Example



3 1/2" COVE MOLDING & CLIP ASSEMBLY



3 1/2" COVE MOLDING & CORNER CLIP ASSEMBLY

Easy Order Guide: CM350WH = 3 1/2" x 8' , White Cove Molding

1/2" Fittings

CABLEREADY molding is made of 26 gauge Galvalume® steel, which lasts longer and is more durable than G90 hot dipped steel or plastic molding systems.



1/2" COUPLING FITTING
Part #CO050*

Covers seam when two pieces of molding are joined together.



1/2" OUTSIDE CORNER
Part #OC050*

Makes a 90° outside turn around corners involving two outside walls.



1/2" 90° RIGHT ANGLE
Part #RA050*

Makes a left or right turn at a 90° angle on flat surface.



1/2" TEE FITTING
Part #TE050*

Allows molding to split into three different directions at 90° angles.



1/2" END CAP FITTING
Part #EC050*


Covers end piece of molding.



1/2" INSIDE CORNER
Part #IC050*

Makes a 90° inside turn in a corner. (i.e. a wall to wall or ceiling to wall)

The 26 gauge Galvalume® steel is delivered to ICM Corp. in spools. This specialized sheet metal is then taken to the roll form machine where it is formed into cable molding.

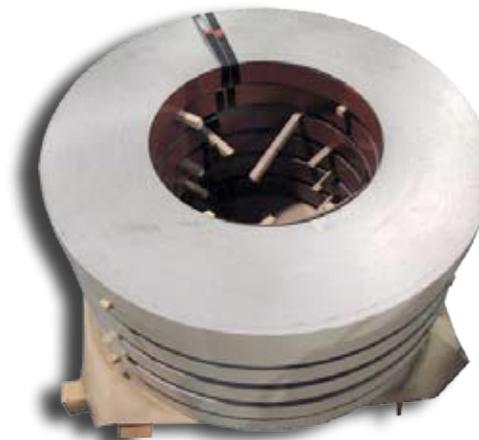

•Most 1/2" fittings mount directly onto the CL050 clip.

3/4" Fittings

CABLEREADY molding is manufactured in the United States. This gives us the ability to customize your molding to match the special requirements of your installation.



1" X 3/4" REDUCING FITTING
Part #RD175*
Reduces molding size from 1" to 3/4" in a straight run of molding.



3/4" COUPLING FITTING
Part #CT075*
Covers seam when two pieces of molding are joined together.




3/4" OUTSIDE CORNER
Part #OC075*
Makes a 90° outside turn around corners involving two outside walls.



3/4" 90° RIGHT ANGLE
Part #RA075*
Makes a left or right turn at a 90° angle on flat surface.



3/4" TEE FITTING
Part #CT075*
Allows molding to split into three different directions at 90° angles.



3/4" END CAP FITTING
Part #EC075*
Covers end piece of molding and/or as a reducer from 3/4" to 1/2" molding size.



3/4" INSIDE CORNER
Part #IC075*
Makes a 90° inside turn in a corner such as a wall to wall or ceiling to wall.

CABLEREADY cable molding is versatile and can be applied to a variety of building materials including brick, metal and stucco.




HELPFUL HINTS

When installing the molding on an uneven surface, the clips should be installed on the high points as close to the 48" centers as possible.

1" Fittings

All CableReady molding is long lasting and carries a 15 year warranty against cracking, warping, discoloring, blistering or peeling due to ultraviolet rays or harsh weather conditions.



1" COUPLING FITTING Part #CO100*

Covers seam when two pieces of molding are joined together.



1" OUTSIDE CORNER Part #OC100*

Makes a 90° outside turn around corners involving two outside walls.




1" 90° RIGHT ANGLE Part #RA100*

Makes a left or right turn at a 90° angle on flat surface.



1" TEE FITTING Part #TE100*

Allows molding to split into three different directions at 90° angles.



1" END CAP FITTING Part #EC100*

Covers end piece of molding. Note: EC100 must be cut in the field to make end cap.



1" INSIDE CORNER Part #IC100*

Makes a 90° inside turn in a corner such as a wall to wall or ceiling to wall.



1" x 3/4" REDUCING FITTING Part #RD175*

Reduces molding size from 1" to 3/4" in a straight run of molding.



1" CROSSING TEE Part #CT100*

Allows molding to split into three different directions at 90° angles.



1" EXPANSION BOOT Part #BO100*

Creates an expansion to cover the hole when entering a lock box, ceiling, or floor.



1" OFFSET ADAPTER Part #OA1-58*

Allows for a step up or step down from a trim board. Standard offset is 5/8". Fitting can be trimmed.




1" BELL ADAPTER Part #BO300*

Covers up to a 2 1/2" hole at the bottom of the bell adapter. Top of bell adapter fits the SR100 Straight Run.



2" Fittings

Easy installation of an 8' section of molding requires 4 anchors, 2 clips, and only 2 minutes to install!



2" COUPLING FITTING Part #CO200*

Covers seam when two pieces of molding are joined together. Improved with metal insert to be more secure. See note.*




2" OUTSIDE CORNER Part #OC200*

Makes a 90° outside turn around corners involving two outside walls.



2" 90° RIGHT ANGLE Part #RA200*

Makes a left or right turn at a 90° angle on flat surface. Is a two piece fitting, RA200 snaps onto a right angle clip.



2" END CAP FITTING Part #EC200*

Covers end piece of straight run molding. Note: EC200 must be cut in the field to make end cap.



2" INSIDE CORNER Part #IC200*

Makes a 90° inside turn in a corner such as a wall to wall or ceiling to wall.



2" x 1" REDUCING FITTING Part #RD201*

Reduces molding size from 2" to 1" in a straight run of molding.



2" CROSSING TEE Part #CT200*

Branches off in four different directions at 90° angles.



2" EXPANSION BOOT Part #BO200*

Creates an expansion to cover the hole when entering a lock box, ceiling or floor.



2" OFFSET ADAPTER Part #OA2-58*

Allows for a step up or step down from a trim board. Standard offset is 5/8". Fitting can be trimmed.



2" x 2" x 1" REDUCING TEE Part #RT221*

Reduces from 2" to 1" at a 90° angle to the 2" molding.



2" BELL ADAPTER Part #BO600*

Covers up to a 4 1/2" hole at bottom of bell adapter. The top of bell adapter fits our SR200 Straight Run.



2" TEE FITTING Part #TE200*


Allows molding to split into three different directions at 90° angles.

*Note: The new CO200 design requires that you install the coupling at the same time as the straight run molding. The interlocking bracket on the CO200 must fit securely between the two lengths of straight run.


Mounting Boxes

Standard boxes have 1/2" and 3/4" knockouts.


Single, double, triple and custom gang sizes are available upon request. We also provide extra deep boxes too!




3" x 4 3/4" x 1 5/8"
SINGLE GANG OUTLET BOX
Part #OB34*
Used to terminate a drop.



5" x 4 3/4" x 2 3/4"
DOUBLE GANG OUTLET BOX
Part #OB34DGEX*
Used to terminate a drop.



3" x 4 3/4" x 2 3/4"
SINGLE GANG OUTLET BOX - DEEP
Part #OB34 SD*
Used to terminate a drop.



2 3/4" x 2 3/4" x 1"
JUNCTION BOX
Part #JB275*
Terminate a drop.

All of our products are warehoused at our facility for fast delivery and can be drop shipped to the job site.

Recommended tools for CableReady Installations.



SHEET METAL SHEAR
Part #HC1251
Cuts straight run molding to desired length.



SUPER SNIP SHEAR
Part #HC1451
Cuts specialty corners or notches in straight run molding and to cut straight run length.



SHEAR HANDLE SPRING REPLACEMENT
Part #RS2531
Shear Handle Spring Replacement



SHEAR BLADE REPLACEMENT
Part #RB2511
Shear Blade Replacement



REPLACEMENT SCREW KIT
Part #4532
Replacement Screw Kit

Note: Replacement Spring, Blade and Screw Kit are the same for both HC1251 and HC1451

CABLEREADY'S

Tools




ANCHOR DRIVER
Part #CR-7
Drives nail-in anchors into the 1/2" clip.



1/2" ENTRY KEY
Part #EK050HD
Allows user to re-enter 1/2" molding after the molding has been installed.



ENTRY KEY
Part #EK100HD
Allows user to re-enter 3/4", 1" and 2" molding after the molding has been installed.



HELPFUL HINTS

When installing vertical risers, it is recommended that all short pieces be placed at the top of the riser. A full piece of molding should be at ground level for added security.

Touch Up Paint



IVORY	TP016IV
REDWOOD	TP016RW
WHITE	TP016WH
BROWN	TP016BR
LIGHT GRAY	TP016LG
DARK GRAY**	TP016DG

- 12.5 oz. cans
- Industrial coating
- Color matches molding
- Ozone friendly (does not contain chlorofluorocarbons)

**Dark Gray in limited quantities

Caulk



IVORY	C2146IV
REDWOOD	C2110RW
WHITE	C2000WH
BROWN	C2111BR
LIGHT GRAY	C2120LG
DARK GRAY**	C2130DG

- 10.5 oz. cans
- Color matches molding
- All temperatures, all weather caulk
- Air cures to a tough rubbery seal
- Paintable with oil or latex paint after curing

**Dark Gray in limited quantities

Anchors


NYLON NAIL-IN ANCHORS - For light duty fastening in masonry, brick, block or concrete. The head of the nail is slotted so the anchor can be removed with a screwdriver. Meets and exceeds GSA Specifications FF-325, Group V, Type 2, Class 4. Use a hammer to insert the Nylon Nail-In Anchors*.

*When using a hammer to insert anchors into the wall surface be careful not to hammer the sides of the clips, since bending the clips out of shape will make removal of the molding very difficult.



Part #	4630	4730	5630	5730
Anchor Size	3/16" x 1"	3/16" x 1 1/2"	1/4" x 1"	1/4" x 1 1/2"
Hole Size	3/16"	3/16"	1/4"	1/4"
Pull Out Strength	250 lbs.	295 lbs.	235 lbs.	290 lbs.
Shear Strength	530 lbs.	680 lbs.	790 lbs.	830 lbs.
Minimum Qty.	100	100	100	100
Bulk Pkg. Qty.	2,000	2,000	2,000	2,000

Customize Your Color

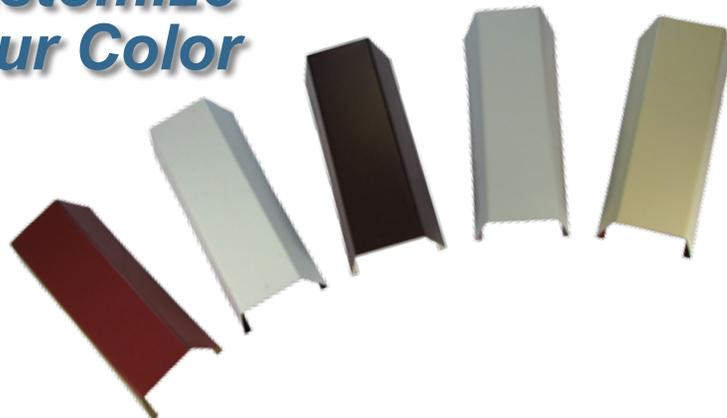

SLEEVE ANCHORS - For heavy duty fastening in masonry, brick, block or concrete. Meets and exceeds GSA Specifications FF-S-325, Group II, Type 3, Class 3. The test values listed were obtained using 3500 psi concrete (no aggregate). A safe working load should not exceed 25% of stated values.



Part #	1712	1713
Anchor Size	3/8" x 1 7/8"	3/16" x 3"
Hole Size	3/8"	3/8"
Pull Out Strength	2700 lbs.	2700 lbs.
Shear Strength	2280 lbs.	2280 lbs.
Minimum Qty.	50	50

PLASTIC ANCHORS - For light duty fastening in masonry, brick, block, concrete or drywall. When using Plastic Anchors holes must be drilled into the wall surface prior to installation. Use Hex Head Screws to anchor clip to wall surface.



Part #	8450	8460
Anchor Size	3/16" x 7/8"	1/4" x 1"
Screw Size	8	10
Hole Size	3/16"	1/4"
Minimum Qty.	100	100
Bulk Pkg. Qty.	2000	2000



HEX HEAD
SCREWS

Part #	#8 HH	#10 HH
Screw Size	#8 x 1	#10 x 1
Minimum Qty.	100	100
Bulk Pkg. Qty.	2000	2000 lbs.

WALLGRABBERS - For light duty fastening in drywall and plaster. No drilling is required. Drive in with hammer and insert a #8 Hex Head Screw to anchor clip to wall surface.



WALLGRABBERS

Part #	WG #8
Anchor Size	#8
Screw Size	#8 x 1
Minimum Qty.	100
Bulk Pkg. Qty.	2000

CABLEREADY molding is made of 26 gauge Galvalume® steel, which lasts longer and is more durable than G90 hot dipped steel or plastic molding systems.

PREPARATION:

- Identify the least obstructive area on the wall to place the molding. Snap chalkline at 2" from any edging.
- Only two clips are needed per 8' section of molding. Starting from the ground up.

DRILL:

- Center the clip at 4' mark, and mark the surface where you will drill the holes.
- Align the clip's end guides with the chalkline.
- Use anchors slightly smaller than the holes to provide for adjustments since the drill bit tends to "walk" on the brick and metal.

ATTACH CLIP:

- Use two anchors to attach each clip.
- The type of wall surface the clip is attached to will determine how the anchors are inserted.*
- As the anchor is being placed, continue to check the alignment of the clip end guides with the chalkline.

ATTACH CABLE:

- After the clips have been installed, use a tie wrap to secure the clip. (only one tie wrap per clip is needed)

SNAP ON MOLDING:

- When snapping the molding on, start from one end and work toward the other.
- Leave a slight space between each section of molding for expansion.

RE-ENTRY:

- CABLEREADY molding requires a special tool to re-enter the molding. The molding and tools are designed specifically to keep vandals out of the system.
- The Entry Key slips under the molding grabbing the flange of the molding and pulling it away from the edge of the clip.

*For detailed instructions on installing CABLEREADY molding please refer to the CABLEREADY Installation Instruction Guide.

**When hammering anchors to secure the clips, be careful not to hammer the sides of the clips, since bending the clips out of shape will make removal of molding very difficult.

DRILL



ATTACH CLIP



ATTACH CABLE



SNAP ON MOLDING




RE-ENTRY



Helpful Hints on Installation

All moldings and fittings are shipped with a blue protective film that is laminated to the product. This film protects the molding as it is being installed. It is recommended that the strippable film be left in place until the molding is installed on the clips. Remove the film by starting at one end of the molding and pulling it off over the entire length of molding. Unlike the molding, the fittings should have the film removed before installation. Some fittings slide into the molding making it very difficult to remove the film after installation.




HELPFUL HINT #2: The fittings are designed to either snap over the molding or slip into the end of the molding, depending on the fitting. A clip is not required to hold fittings in place on the 3/4", 1", and 2" molding. The majority of the fittings are snap over fittings. The snap over fittings are easy to identify because they have a set of tabs on the bottom.



The other fittings are inserted into the end of the piece of molding, and have small notches on each side where the molding fits. Most 1/2" fittings snap directly onto a CLO50 clip.

HELPFUL HINT #3: When installing vertical risers, it is recommended that all short pieces be placed at the top of the riser. A full piece of molding should be at ground level. This will help prevent vandals from trying to remove and damage a piece of molding. If a vertical riser does not rest on the ground, on a trim board, offset, or any place that will support the weight of the riser, it is recommended that an anchor or screw be placed at the bottom piece of molding to support the riser. Due to the

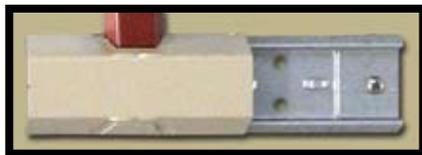

design of the molding, natural expansion and contraction will cause the riser to slide downward over a long period of time. This will create gaps between the pieces of molding unless the support is in place.

HELPFUL HINT #4: When installing the molding on an uneven surface, the clips should be installed on the high points as close to the 48" centers as possible. Another option is to install the full backing plate. The full backing plate can be used in conjunction with the standard clips. You can alternate between the two different types if necessary.

NOTE: The CO200 design requires that you install the coupling at the same time as the straight run molding. The interlocking bracket on the CO200 must fit securely between the two lengths of straight run.



Looking For An Easy Way To Pull Your Cable?

ICM Corp's Cable Caddie's Make Cable Installations A Breeze

- Made in the USA from high quality, lightweight 3/4" steel tubing.
- Unique folding mechanism allows cable caddie to be folded easily for transport.
- Enduring paint finish protects caddie from weathering elements.
- The CC2016B holds one 20" x 16" reel.
- Available with 6" wheels.



CC2016B

To see all ICM Corp. cable caddies go to www.icmcorp.net.

CABLEREADY'S

Proprietary Process

ICM Corp.'s CABLEREADY molding is manufactured in Denver, Colorado, USA. ICM Corp. uses 26 gauge Galvalume® steel which can withstand harsh weather conditions and continue to last for many years. This allows ICM Corp. to provide an extended guarantee on all CABLEREADY cable molding products for a full 15 years. Our CABLEREADY molding is more durable, outlasting G90 hot dipped steel or plastic molding systems.

The Galvalume® steel is delivered in large spools. The sheet metal is formed into the cable molding based on preordered custom sizes by a proprietary roll form machine. This all-in-one machine molds the metal and places a thin protective strip of blue film onto the shaped molding, which is later removed by the professional installer after the molding has been installed.

The punch out machine is used to create custom molded accessories that include right angles, Tee Fittings, outlet boxes, transitions and much more.





ICM Corporation
6260 Downing Street
Denver, Colorado USA 80216

CAT-CR08

