

Digital Signage Collection

AUDIO VISUAL SOLUTIONS FOR DIGITAL SIGNAGE APPLICATIONS



peerless-AV®



AUDIO VISUAL SOLUTIONS FOR DIGITAL SIGNAGE



UNPARALLELED PEOPLE, PROCESSES AND PRODUCTS

Peerless-AV stands as a leader in the AV mounting industry for more than 40 years. We consistently deliver innovative solutions that focus on quality, simple installation and feature-rich functionality.

We consider a "solution" to be more than the product itself. A true solution encompasses how the product is made, how it gets to you and the service you receive. We devote care and attention to every element of our AV solutions so we can fulfill the sum total of your needs.

CONTINUOUS INNOVATION

We are always adding new products to keep pace with the constant changes in AV technology.

ADVANCED MANUFACTURING

We design, manufacture and test products in our U.S.-based facility; ensuring that all products will meet your exacting standards.

COMMITMENT TO QUALITY

We guarantee your satisfaction—designing for ease of installation, improved durability, better aesthetics—your needs guide our manufacturing process, from conception to production.

VIDEO WALL SOLUTIONS • DIGITAL MENUBOARD KITS • INTERACTIVE KIOSKS • WIRELESS • AND MORE!

Highly engaging interactive technologies like touch, gesture, dynamic media and mobile devices are changing the way we shop, communicate and interact with one another. Digital media and digital signage has officially gone from being a nice-to-have messaging system to a must-have interactive marketing platform.


Peerless-AV continues to be a pioneer and market leader in the Digital Signage arena. We consistently raise the bar through providing innovative solutions for interactive displays, out-of-home advertising, kiosks, in-store displays, POS solutions—we have creative, compelling solutions for just about any environment.

Our experience allows us to meet the challenging goals of our clients and often exceed their expectations. As the industry leader in Custom Solutions, we offer true innovation, technical expertise and state-of-the-art facilities to take projects from concept through successful production.


Whether you need a quick solution for a few digital displays or a completely custom solution for a large, multi-screen rollout, Peerless-AV is here to support and solve your unique project challenges.




VIDEO WALL MOUNTS




DS-VW765-POR



DS-VW646-2X2



DS-VW665

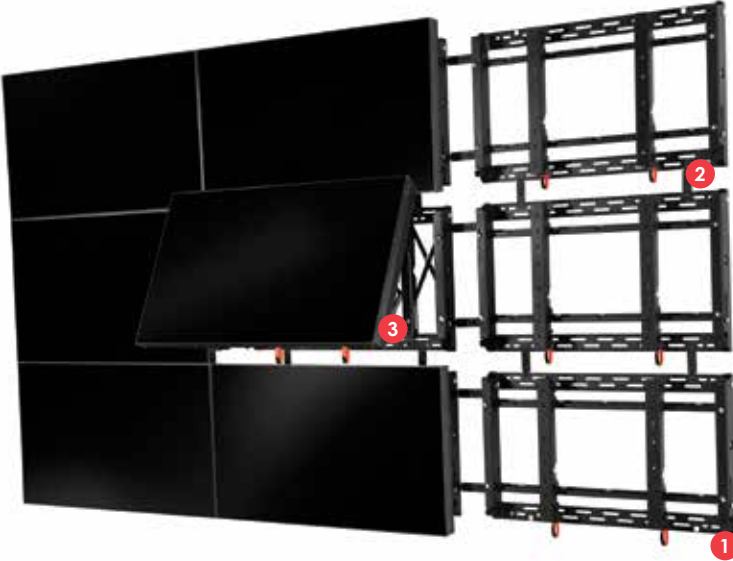













DS-VW765-LAND
3 x 3 display configuration shown, limitless configurations possible.

1. 8 MICRO-ADJUSTMENTS AT YOUR FINGERTIPS
8 micro-adjustment points between displays offer the easiest way to perfectly align multiple displays in limitless configurations

2. ELIMINATE GUESSWORK AND ON-SITE CALCULATIONS
Model-specific wall plate spacers connect between the mounts to ensure perfect spacing alignment between displays, saving you time and effort

3. QUICK ACCESS TO DISPLAY COMPONENTS
Pull-out and prop-open display lets you service the video wall without any hassle

							
DS-VW650	DS-VW665	DS-VW765-LAND	DS-VW765-POR	DS-VW646-2X2 DS-VW660-2X2	DS-VWS###(-P)	DS-ACC765	
ULTRA THIN FLAT VIDEO WALL MOUNT <ul style="list-style-type: none">Great for 2 x 2 configurationsCustom wall plate spacers eliminate the guesswork and on-site installation calculationsSimple horizontal adjustment makes aligning displays quick and easyUltra-thin design provides a streamlined video wall profile, perfect for ADA applicationsDurable locking rail holds display ensuring a safe and secure installationIncluded security hardware deters tampering and theft	VIDEO WALL MOUNTING SOLUTION NON-PULL OUT <ul style="list-style-type: none">Modular mount for unlimited video wall display configurations utilized for landscape applicationsTool-less 8-point micro adjustments for easy display alignmentCustom wall plate spacers eliminate the guesswork and on-site installation calculationsIntegrated cable management tie-backs make display-to-display cabling simpleIncluded security hardware deters tampering and theft	FULL-SERVICE VIDEO WALL MOUNT FOR LANDSCAPE ORIENTATION <ul style="list-style-type: none">Pull-out/prop-open mechanism provides quick service accessModular mount for unlimited video wall display configurations utilized for landscape applicationsCustom wall plate spacers eliminate the guesswork and on-site installation calculationsTool-less 8-point micro adjustments for easy display alignmentIntegrated cable management tie-backs make display-to-display cabling simpleSecurity hardware option prevents displays from articulating	FULL-SERVICE VIDEO WALL MOUNT FOR PORTRAIT ORIENTATION <ul style="list-style-type: none">Pull-out/prop-open mechanism provides quick service accessModular mount for unlimited video wall display configurations utilized for portrait applicationsCustom wall plate spacers eliminate the guesswork and on-site installation calculationsTool-less 8-point micro adjustments for easy display alignmentIntegrated cable management tie-backs make display-to-display cabling simpleSecurity hardware option prevents displays from articulating	UNIVERSAL 2X2 VIDEO WALL MOUNTING KIT <ul style="list-style-type: none">2 x 2 video wall mounting kit with all required hardware to mount four displays in a 2 high x 2 wide configurationHorizontal adjustment makes mounting and aligning displays quick and easyIncluded security hardware deters tampering and theftADA compliant with displays measuring 1.71" deep or lessIncludes adapter rail alignment measuring plate to assist in the mounting of the displays	VIDEO WALL SPACER KIT <ul style="list-style-type: none">Custom spacer kit to accommodate DS-VW650, DS-VW665, DS-VW765-LAND and DS-VW765-POR Video Wall Mounting SystemsGreatly reduces the guesswork of installation calculations	CABLE RELEASE KIT FOR PEERLESS-AV FULL SERVICE VIDEO WALL MOUNTS (DS-VW765-LAND, DS-VW765-POR) <ul style="list-style-type: none">Provides easy access to recessed wall areasMakes maintenance quick and easyThin and durable cableTough, long-lasting fastener for secure attachmentEnables display to stay positioned in video wall matrix during maintenance	
Accessories page 31							

Display size	40" to 50"	40" to 65"	40" to 65"	40" to 65"	40" to 46" <small>DS-VW646-2X2</small> : 47" to 60" <small>DS-VW660-2X2</small>
VESA® pattern	100mm increments starting at 200 x 200mm up to 600 x 400mm	100mm increments starting at 200 x 200mm up to 700 x 400mm <small>Additional patterns supported with adapter plates</small>	100mm increments starting at 200 x 200mm up to 700 x 400mm <small>Additional patterns supported with adapter plates</small>	100mm increments starting at 200 x 200mm up to 400 x 600mm <small>Additional patterns supported with adapter plates</small>	1733 x 1136mm <small>DS-VW646-2X2</small> : 2070 x 1318mm <small>DS-VW660-2X2</small>
Distance from the wall	0.69" (18mm)	3.08"-3.83" (78-97mm)	3.08"-3.83" (78-97mm)	3.08"-3.83" (78-97mm)	2.28" (58mm)
Micro-adjustments	—	8-point tool-less adjustment	8-point tool-less adjustment	8-point tool-less adjustment	—
Horizontal display adjustment	Yes	Yes	Yes	Yes	Yes
Security	Yes	Yes	Yes	Yes	Yes
Max load	75lb (34.02kg)	125lb (57kg)	125lb (57 kg)	125lb (57 kg)	600lb (272kg)
Listings / Certifications					

* Contact Customer Care to order Custom Wall Spacers specially designed for your video wall configuration



Scan QR code with your Smartphone to watch a video about our Full Service Video Wall or visit videos.peerless-av.com.

VIDEO WALL CARTS



DS-VWC560 shown

- 1. VERSATILE**
2 x 2 and 2 x 1 configuration options
- 2. NO TOOLS REQUIRED FOR DISPLAY MICRO-ADJUSTMENT**
Simple tool-less 8 point micro adjustment aligns displays seamlessly
- 3. MEDIA STORAGE**
Base incorporates internal shelving to house components and wires for a clean appearance
- 4. HEAVY DUTY STEEL CASTERS**
Lockable 5" casters enable safe and easy maneuverability over various flooring surfaces




DS-VWC560	DS-VWC655-3X3	DS-VWS546-2X2
UNIVERSAL 2X2 VIDEO WALL CART <ul style="list-style-type: none">Lockable 5" casters enable safe and easy maneuverability over various flooring surfacesTool-less 8-point micro adjustments for easy display alignment2 x 2 or 2 x 1 configurationCompatible with 200, 300 and 400mm (vertical) and PLP for larger mounting hole patternsInternal cable management for a clean, clutter-free appearanceBase incorporates internal shelving to house components and wires for a clean appearance	UNIVERSAL 3X3 VIDEO WALL CART <ul style="list-style-type: none">Lockable 5" casters enable safe and easy maneuverability over various flooring surfacesTool-less 8-point micro adjustments for easy display alignment3 x 3 configurationCompatible with 200, 300 and 400mm (vertical) and PLP for larger mounting hole patternsInternal cable management for a clean, clutter-free appearanceBase incorporates internal shelving to house components and wires for a clean appearance	UNIVERSAL 2X2 VIDEO WALL STAND <ul style="list-style-type: none">2x2 video wall stand kitHorizontal adjustment makes mounting and aligning displays quick and easyDesigned for quick set up and breakdown making it ideal for rental and staging applicationsVideo wall is height adjustable on the 72" (1829mm) polesInternal cable management for a clean, clutter-free appearanceVideo wall conversion kits model ACC-DS-VWS2X2 available for existing FPZ-600 stands

Accessories page 31


Display size	40" to 60"	42" to 55"	40" to 46"
VESA® pattern	200, 300 and 400mm vertically	200, 300 and 400mm vertically	200 x 200 up to 800 x 400mm
Micro-adjustments	8-point tool-less adjustment	8-point tool-less adjustment	—
Horizontal display adjustment	Yes	Yes	Yes
Security	Yes	Yes	—
Max load	500lb (227kg)	1000lb (454kg)	600lb (272kg)
Listings / Certifications	RoHS MADE IN USA	RoHS MADE IN USA	RoHS MADE IN USA

VIDEO WALL CEILING MOUNTS

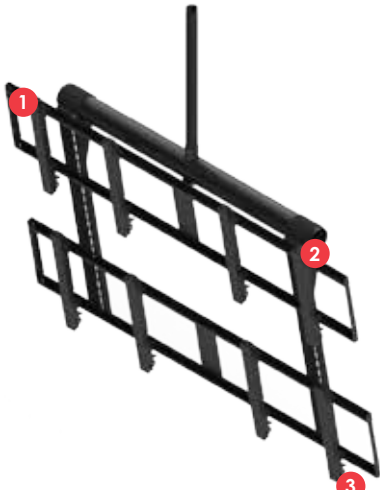

DS-VWT955-2X2 shown

- 1. UNIVERSAL**
Fits most displays from 40" to 55"
- 2. TILT FUNCTIONALITY**
Can be used in multiple tilt positions for the ideal viewing angle
- 3. NO TOOLS REQUIRED FOR DISPLAY MICRO-ADJUSTMENT**
Simple 8-point tool-less micro adjustment aligns displays seamlessly






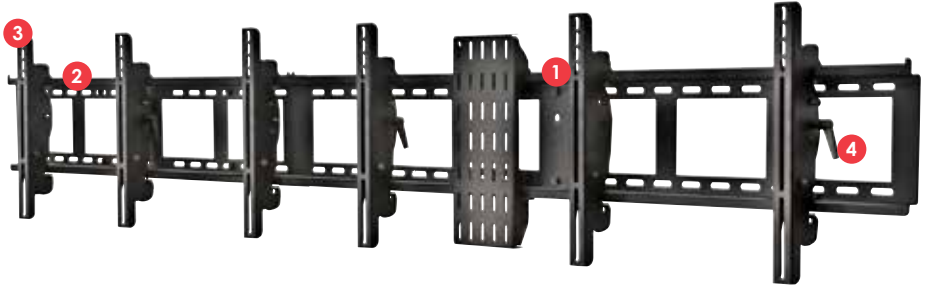
DST940	DS-VWT955-2x2
DUAL DISPLAY CEILING MOUNT SYSTEM <ul style="list-style-type: none">Single adapter plate keeps the face of both displays on the same planeEasy glide bracket design ensures displays are securely attached to the adapter plateUniversal display adapters quickly hook onto adapter plate for fast installationHorizontal adjustment allows displays to easily slide together for a seamless appearance	UNIVERSAL 2X2 CEILING MOUNT <ul style="list-style-type: none">Ceiling mounted 2 x 2 video wall solutionSupports mounting hole patterns of 200 x 200 up to 600 x 400mm. Additional patterns supported with adaptor platesTilt options of 5, 10, 15 and 20 degreesTool-less 8-point micro adjustments for easy display alignmentCompatible with Peerless-AV standard columnsIncluded security hardware deters tampering and loss

Accessories page 31

Display size	37" to 46"	40" to 55"
VESA® pattern	Up to 600 x 400mm	Up to 600 x 400mm
Tilt	0°-20°	+5°, +10°, +15° and 20°
Micro-adjustments	—	8-point tool-less adjustment
Horizontal display adjustment	Yes	Yes
Security	Yes	Yes
Max load	150lb (68kg)	400lb (182kg)
Listings / Certifications	RoHS MADE IN USA	RoHS MADE IN USA

DIGITAL MENU BOARD KIT





DS-VL-H048 and DS-VL-H036 and ACC-DSV329 with accessory DS-ACC-LDCM shown


1. NO MEASURING
Install multiple displays onto one mounting system with virtually no measuring required

2. INFINITE POSSIBILITIES
Create any combination of wall plates and vertical rails forming a limitless linear array of displays


3. INSTALLATION SECURITY
Prevent tampering and theft with included security hardware

4. VERSATILITY
Portrait or landscape orientation with tilt at -5, 0, 5, 10 and 15 degrees


DIGITAL MENU BOARD KIT




DS-VL-H072: 72"W




DS-VL-H060: 60"W




DS-VL-H048: 48"W




DS-VL-H036: 36"W



DS-VL-H024: 24"W



DS-VL-H018: 18"W



ACC-DSV240(-P) ACCDSV329(-P) ACC-DSV449(-P) ACC-DSV503 (-P) ACCDSV745(-P)

DS-VL-H models


DIGITAL MENU BOARD KIT - HORIZONTAL WALL PLATES

- Adjustable up to 15° of forward tilt and -5° backward tilt for optimal viewing angle
- Infinite horizontal configuration
- Displays can be mounted both landscape and portrait
- Horizontal display adjustment


Customizable mounting kit that can hold any number of displays, landscape or portrait, in an infinite linear formation. Contact Customer Care for assistance in calculating your Linear Display configuration or visit info.peerless-av.com/menuboard

ACC-DSV models

DIGITAL MENU BOARD KIT - VERTICAL DISPLAY MOUNTING RAILS





DS-VL-H060 with ACC-DSV449 shown



DS-VL-H060 with ACC-DSV240 shown

ACCESSORY















DS-ACC-LDCM


CABLE MANAGEMENT ACCESSORY
COLOR: Black

- Neatly secures cables into one location
- Organizes cables out of viewing area of display arrangement
- Easy and fast cable management using cable ties and easy access slots

Accessories page 31

<div>Display size</div> <div>VESA® pattern</div> <div>Distance from the wall</div> <div>Tilt</div> <div>Landscape to portrait</div> <div>Security</div> <div>Max load</div> <div>Listings / Certifications</div>	20" to 65"		20" to 65"	
	—		ACC-DSV240(-P): Up to 240mm ACC-DSV329(-P): Up to 329mm ACC-DSV449(-P): Up to 449mm	ACC-DSV503(-P): Up to 503mm ACC-DSV745(-P): Up to 745mm
	—		ACC-DSV240(-P): 2.55" (65mm) ACC-DSV329(-P): 2.6" (66mm) ACC-DSV449(-P): 2.6" (66mm)	ACC-DSV503(-P): 2.6" (66mm) ACC-DSV745(-P): 2.6" (66mm)
	—		-5°, 0°, 5°, 10°, 15°	
	—		Yes*	
	Yes		Yes (-P for standard hardware)	
	350lb (158.8kg)		ACC-DSV240(-P): 125lb (56kg) ACC-DSV329(-P): 150lb (68kg) ACC-DSV449(-P): 175lb (79kg)	ACC-DSV503(-P): 250lb (113.4kg) ACC-DSV745(-P): 350lb (158.8kg)
	RoHS  MADE IN USA 		RoHS  MADE IN USA 	

MENU BOARD CONFIGURATOR





Visit digitalsignage.peerless-av.com to use our online Menu Board Configurator

8


9

MEDIA STORAGE, WALL, CORNER & CEILING MOUNTS






CM850



DST960

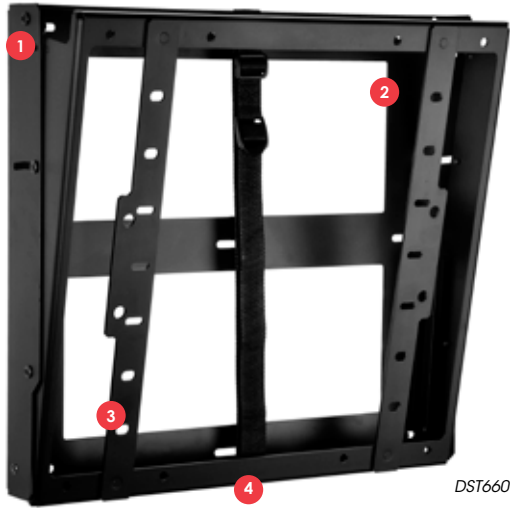

DST660 shown

1. ADJUSTABLE VIEWING ANGLE
Continuous or fixed tilt options available

2. COMPONENT STORAGE
Houses and stores computers, media controllers and graphics drivers

3. UNIVERSAL
Accommodates VESA® patterns from 200 x 100 up to 400 x 400mm without the need for an adapter

3. PROP BARS
Allows access to the component storage area without having to remove the display

								
		DST660	SP850-UNLP(S)(GB)(GS)	DSX750	CM850(-S)	DST960	PANA-85WM	PANA-85CEIL
<p><i>* Requires display to be removed and reset on mount.</i></p>		FLAT/TILT WALL MOUNT WITH MEDIA PLAYER STORAGE <ul style="list-style-type: none">Accommodates media players up to 12" x 13" x 2.4" (305 x 330 x 61mm)The media player can be removed from the bottom if replacement, repair or maintenance is necessary without having to remove the displayDisplay can be mounted in portrait or landscapeContinuous tilt options from 0-10 degrees or fixed at 0, 3.5 and 7 degreesIncluded security hardware deters tampering and loss	PULL-OUT SWIVEL WALL MOUNT COLOR: Black, silver, high gloss black or high gloss silver <ul style="list-style-type: none">Integrated cable management for a clean lookLocking tab provides optional swivel restriction to one sideLock Key™ installation tool secures arms for easy display installationLock-out feature prevents unwanted extensionIncludes hardware for installation to wood stud, concrete or cinder block	MEDIA PLAYER HOLDER ACCESSORY <ul style="list-style-type: none">Houses media player behind the display up to 9.5" x 7.75" x 2.5" (241 x 197 x 63mm)Compatible with a variety of Peerless-AV pullout articulating wall mountsProp open feature provides quick service access without removing displaySecurity screws prevent tampering and theftLandscape or portrait orientation	CORNER MOUNT COLOR: Black or silver <ul style="list-style-type: none">Includes SmartMount® Pull-Out Swivel Mount (SP850-UNL)Extendable arms accommodate multiple display sizes without having to adjust wall mount placementWall units accommodate speakers when used with smaller displays (wall unit maybe visible with some smaller displays)Optional shelf available for AV components (ACC324), see page 31Includes hardware for installation to wood stud, concrete and cinder block	FLAT/TILT UNIVERSAL CEILING MOUNT WITH COMPUTER/MEDIA PLAYER STORAGE <ul style="list-style-type: none">Universal mounting in either portrait or landscape orientationContinuous tilt from 0-15 degreesAvailable area within mount for housing a computer or media controller device 16.79" x 11.58" x 3.18" (426 x 294 x 81mm)Internal side and top mounting locations provided for an electrical boxClean design hides components and cable from view	WALL MOUNT FOR 85" DISPLAY <ul style="list-style-type: none">Tilt 0, 3.5, and 7 degreesHook on design allows display to be easily placed into key hole slotsTriple stud wall plate with attachment capability to wood studs, concrete or cinderLandscape or portrait	CEILING MOUNT FOR 85" DISPLAY <ul style="list-style-type: none">Keyhole slots provide easy installationTilt 5, 10, 15, 20 degrees360 degrees of swivel
Accessories page 31								
Display size		40" to 60"	32" to 65"	32" to 60"	32" to 60"	40" to 60"	85"	85"
VESA® pattern		From 200 x 100 up to 400 x 400mm	100, 200 x 100mm	100 x 100, 200 x 100, 100 x 200, 200 x 200mm	—	From 200 x 100 up to 400 x 400mm <small>ACC-V800X available for 600 x 400 and 800 x 400mm patterns</small>	—	—
Adjustable mounting pattern (W x H)		—	730 x 433mm (28.75" x 17.05")	—	730 x 433mm (28.75" x 17.05")	—	—	—
Distance from the wall, corner or ceiling		2.83" (72mm) <small>(from the wall)</small>	3.40"-11.90" (86-302mm) <small>(from the wall)</small>	3.63" (92mm) <small>(from the wall)</small>	18.04"-25.79" (458-655mm) <small>(from the corner)</small>	Up to 12' (3657mm) <small>(Varies depending on ceiling plate and extension column used)</small>	11.56" (294mm) <small>(from the wall)</small>	Up to 12' (3657mm) <small>(Varies depending on ceiling plate and extension column used)</small>
Tilt swivel roll		0°-10° <small>(with 0°, 3.5° & 7° Incline™)</small> —	0°, 5° or 10° ±45° ±1°	-25° tilt <small>(for media player access)</small>	0°, 5° or 10° ±45° ±1°	+15° / -0°	0°, 3.5°, and 7° —	5, 10, 15, 20° 360°
Horizontal display adjustment		—	up to 3.5" (89mm)	—	3.5" (89mm)	—	—	—
Landscape to portrait		Yes*	—	Yes*	—	Yes*	Yes*	—
Security		Yes	Yes	Yes	Yes	Yes	—	Yes
Max load		125lb (57kg)	150lb (68kg)	—	150lb (68kg)	125lb (57kg)	270lb (122kg)	300lb (136kg)
Listings / Certifications								

BACK-TO-BACK CEILING MOUNTS



DST965 shown

- 1. CONVENIENT STORAGE**
Two component shelves provide storage for standard size computers
- 2. CLEAN PROFILE**
Side panels hide cables and media players from view
- 3. UNIVERSAL**
Accommodates mounting patterns up to 730 x 433mm



MOD-FPMD

DST965

Media storage shelves

BACK-TO-BACK CEILING MOUNT

- For 10"-65" back-to-back flat panel displays
- Holds 2 displays back-to-back with up to +20°/-5° tilt
- Landscape or portrait orientation
- Requires extension column and ceiling plate, sold separately

BACK-TO-BACK CEILING MOUNT WITH MEDIA PLAYER STORAGE


- Holds two displays back-to-back at a 20° fixed tilt
- Removable side panels for easy maintenance
- Two component shelves provide storage for standard size computers
- Cables are routed through the column for a clean appearance
- Includes Peerless-AV universal mounting brackets
- Security hardware to deter tampering and loss

Accessories page 31

Display size	10" to 65"
VESA® pattern	75/100mm
Adjustable mounting pattern (W x H)	Requires universal adapter plate (sold separately)
Distance from ceiling	Up to 12' (3657mm) (Varies depending on ceiling plate and extension column used)
Tilt swivel	+20°/-5° 360°
Landscape to portrait	Yes*
Security	Yes
Max load	374lb (170kg)
Listings / Certifications	RoHS MADE IN USA

Display size	40" to 65"
VESA® pattern	Up to 600 x 400mm
Adjustable mounting pattern (W x H)	730 x 433mm (28.75" x 17.05")
Distance from ceiling	Up to 12' (3657mm) (Varies depending on ceiling plate and extension column used)
Tilt swivel	Fixed 20° 360°
Landscape to portrait	—
Security	Yes
Max load	300lb (136kg)
Listings / Certifications	RoHS MADE IN USA

MULTI-DISPLAY CEILING MOUNTS

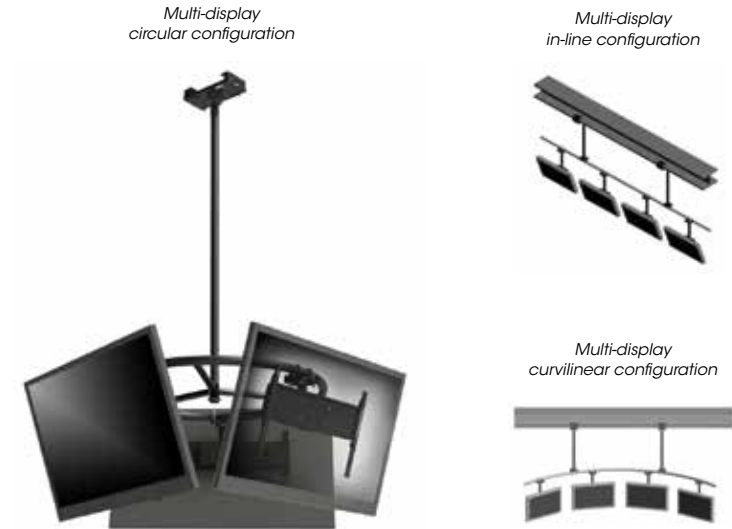

- 1. MULTI-DISPLAY MOUNT**
Multi-display mount for 3 to 4 flat panel displays
- 2. CONFIGURATION OPTIONS**
Three different configurations: in-line, curvilinear, and circular
- 3. DROP LENGTH OPTIONS**
Choose desired ceiling drop length and drop length of displays from pipe



MDJ models


MULTI-DISPLAY IN-LINE, CURVILINEAR AND CIRCULAR CEILING MOUNTS

- Multi-display for 3 to 4 flat panel displays
- Multiple drop down length options from 1'-12'
- Mounts to virtually all ceiling surfaces
- Theft-resistant security fasteners secure the display to the mount to keep equipment safe
- Requires accessories - PLCM-2, ACC600, DCS, DCT, ADD, AEC or EXT, see page 31

Accessories page 31

Display size	32" to 50"
VESA® pattern	Requires display specific PLP adapter plate (sold separately)
Adjustable mounting pattern (W x H)	Requires universal adapter plate (sold separately)
Distance from ceiling	1'-12' (300-3657mm) (Varies depending on ceiling plate and extension column used)
Tilt swivel	+20° 360°
Pipe length	MDJ700: 120" (3048mm) MDJ710: 180" (4572mm) MDJ720: 240" (6096mm) MDJ701: 120" (3048mm) MDJ711: 180" (4572mm) MDJ721: 240" (6096mm) MDJ760: 48" dia. (1219mm)
Landscape to portrait	Yes*
Security	Yes
Max load	600-1200lb (272-545kg) (Depending on ceiling attachments used)
Listings / Certifications	RoHS MADE IN USA

MODULAR SERIES CEILING & FLOOR-TO-CEILING KITS

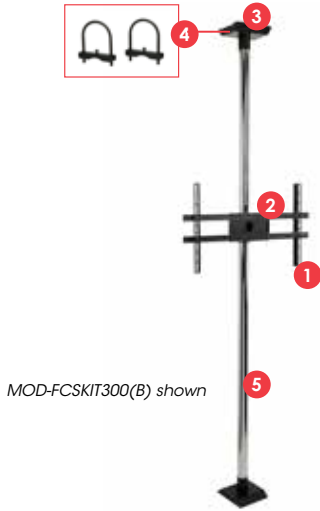

- 1. **UNIVERSAL DISPLAY ADAPTOR**
Compatible with display mounting patterns up to 700 x 400mm
- 2. **QUICK CONNECT DESIGN**
Includes simple hook-on feature, with +20° to -5° tilt and locks at every 5° increment
- 3. **INTEGRATED CABLE MANAGEMENT**
Runs through column with open access at both ends for ease of use
- 4. **UNIVERSAL MOUNTING**
Installs to wood joist and concrete or to truss/pipes via accessory clamp kit MOD-AUB
- 5. **MATCH ANY DECOR**
Column available in black or chrome

MOD-FPSKIT100(B)
MOD-FPSKIT150(B)



- MODULAR SERIES CEILING KIT**
COLOR: Black/Chrome, Black
- Universal display adaptors for 32" to 60" displays with VESA® mounting patterns up to 700 x 400mm
 - Heavy-duty flat plate mount securely mounts to wood or concrete ceilings
 - Display can be positioned at any height along the pole
 - Cathedral ceiling plate can be angled ±60° to accommodate vaulted or sloped ceilings
 - Modular design allows additional displays to be stacked on a single pole
 - Pre-assembled Ceiling Kit includes: Cathedral ceiling plate, 39" (1m) chrome or black extension pole, with MOD-FPSKIT100(B) or 59" (1.5m) chrome or black extension pole with MOD-FPSKIT150(B) models, single display flat panel mount, large universal adaptor

MOD-FPSKIT300(B)



- MODULAR SERIES FLOOR-TO-CEILING KIT**
COLOR: Black/Chrome, Black
- Universal display adaptors for 32" to 60" displays with VESA® mounting patterns up to 700 x 400mm
 - Heavy-duty flat plate mount securely mounts to wood or concrete ceilings and floors
 - Display can be positioned at any height along the pole
 - Cathedral ceiling plate can be angled ±60° to accommodate vaulted or sloped ceilings
 - Modular design allows additional displays to be stacked on a single pole
 - Pre-assembled Floor-To-Ceiling Kit includes: Flat ceiling/floor plates, 118" (3m) chrome or black extension column single display flat panel mount, display stacking clamp, large universal adaptor

Visit peerless-av.com to view full line of individual components for 'Build Your Own' Modular Series Mounting Solutions

Display size	32" to 60"	32" to 60"
VESA® pattern	Up to 700 x 400mm	Up to 700 x 400mm
Adjustable mounting pattern (W x H)	724 x 400mm (28.50" x 15.75")	724 x 400mm (28.50" x 15.75")
Distance from ceiling or floor-to-ceiling	39" (1m) MOD-FPSKIT100(B) 59" (1.5m) MOD-FPSKIT150(B)	118" (3m) MOD-FPSKIT300(B)
Tilt	+20°/-5°	±5°
Security	Yes	Yes
Max load	264 lb (120kg)	374 lb (170kg)
Listings / Certifications	RoHS, USA	RoHS, USA

STANDS AND CARTS



- 1. **NO WALL, NO PROBLEM!**
Complementing the décor of any environment, this stand is the ideal addition, when mounting to a wall is not an option
- 2. **CLEAN APPEARANCE**
Cables are easily routed from display to base of the stand for a clean installation
- 3. **TAMPER-PROOF BASE**
Keep devices and content drivers safely hidden from sight
- 4. **INDUSTRIAL STRENGTH**
Attractive base supports up to 400lb (181kg)



SR560M

- FLOOR CART**
- SR560M:** Black cart with metal shelf
- Incremental tilt of +5°, 0°, and -2° locks in the ideal viewing angle
 - Maneuvers easily on 4" (102mm) swivel casters, with 2 of them locking
 - Adjustable metal shelf holds AV components and accessories
 - Internal cable management for clean, clutter free appearance
- Also available as floor stands, contact Peerless-AV Customer Care



SC560DPB | SC560DPS

- FLOOR CART**
- SC560DPB:** Black poles and black base
SC560DPS: Chrome poles and black base
- Chrome or black posts to match the décor of any room or space
 - Incremental tilt of +5°, 0°, and -2° and locks in the ideal viewing angle
 - Internal cable management for clean, clutter free appearance
 - Maneuvers easily on 4" (102mm) swivel casters, with 2 of them locking
- Also available as floor stands, contact Peerless-AV Customer Care



FPZ-600

- FLOOR STAND**
- Fits single or back-to-back 32" to 70" flat panel displays.
 - Up to four displays with additional dual display cartridge
 - Portrait or landscape orientation
 - Internal cable management for a clean clutter free appearance
- Model FPZ-670 available for 50"-71" displays, contact Peerless-AV Customer Care

* Requires display to be removed and reset on mount.

Accessories page 31

Display size	32" to 65"	32" to 65"	32" to 70"
VESA® pattern	Up to 600 x 400mm	Up to 200 x 200mm <i>Additional non-VESA® display adapter plates also available</i>	100, 200 x 100 and 200 x 200mm <i>Additional non-VESA® display adapter plates also available</i>
Adjustable mounting pattern (W x H)	730 x 433mm (28.75" x 17.05")	<i>Requires universal adapter plate (sold separately)</i>	<i>Requires universal adapter plate (sold separately)</i>
Vertical adjustment	Continuous	Continuous	Continuous
Tilt swivel	+5°, 0°, -2° 360°	+5°, 0°, -2° 360°	—
Landscape to portrait	Yes*	Yes*	Yes*
Security	Yes	Yes	Yes
Max load	250lb (113kg) display 200lb (74kg) display 50lb (22kg) shelf	115lb (42kg)	200b (90kg) per display up to four displays with ACC604
Listings / Certifications	UL, RoHS, USA	UL, RoHS, USA Pending	RoHS, USA



THE ONLY SINGLE-SOURCE KIOSK SOLUTIONS PROVIDER

Specifying and having a large-format interactive kiosk built used to be a daunting, time-consuming task. Not anymore. Peerless-AV, the only large-format kiosk integrator, makes it turnkey, cost-efficient and easy with:

- Our **Kiosk Partner Program** that gives you access to a wide range of the industry's best technologies such as displays, media players, software, cameras, content, and more.
- **KioskBuilder™**, our exclusive self-serve online configurator, that allows you to quickly specify your technology requirements.
- An **extensive range of made-in-the-U.S.A. kiosk enclosures** to allow you customization freedom.
- A **dedicated integration area** where we assemble everything into one of our kiosk enclosures.
- **Direct shipment of kiosk(s)** to you or the installation site.

OUR KIOSKS ARE CUSTOMIZABLE IN EVERY WAY



A FULLY INTEGRATED AND READY-TO-INSTALL CUSTOM KIOSK AT YOUR FINGERTIPS

We ask. You answer.
KioskBuilder does the rest.

Just go to kiosks.peerless-av.com, where the KioskBuilder application will guide you through a simple series of questions such as:

- Will the kiosk be indoors or outdoors?
- Portrait or landscape orientation?
- Free-standing, desktop or wall-mounted?
- What kind of display/touch technology, media player, etc., do you want?

Then, KioskBuilder provides you with options and you make your selections. It's that easy.

Choose from the best names in the business.

We have partner agreements with top-tier technology companies that allow us to get you any high-quality products you need. It also ensures product compatibility for flawless performance for years to come. We work with:

DISPLAY MANUFACTURERS

- ELO
- LG
- NEC Display Solutions
- Panasonic
- Phillips
- Samsung
- Sharp
- Tech Global
- Touch Systems

MEDIA PLAYERS

- Actineon
- AOpen

CONTENT CREATION

- Next Now
- Rise Display
- Saddle Ranch Digital

CONTENT MANAGEMENT SOFTWARE

- Dynasign
- Rise Display
- Scala

POST SALES SERVICE

- Avnet Services
- Legacy Retail Services

WEB CAMERA

- Logitech
- Microsoft



Get started at kiosks.peerless-av.com.



Floor Standing Landscape Kiosk
For 40", 42", 46", 47" screens
up to 2.25" thick
KIL546 shown in black



Floor Standing Portrait Kiosk
For 40", 42", 46" 47", 55" screens
up to 4" thick
KIP546 shown with vinyl wrap



In-Wall Kiosk,
Portrait & Landscape models
For 40", 42", 46", 47" screens
up to 2.25" thick
KIP746 shown in silver



Wall Kiosk,
Portrait & Landscape models
For 40", 42", 46", 47" screens
up to 2.25" thick
KIP647 shown with custom color



Desktop Kiosk
For iPad tablets
KIP410I shown with custom color



Don't see a design or size you're looking for?
Contact our dedicated Kiosk design team to develop a solution that perfectly matches your vision.



1. **HINGED LOCKING FRAME**
Highly secure frame hinges open for easy installation and maintenance access
2. **8-WAY TOOL-LESS MICRO ADJUSTMENT**
Provides quick vertical, horizontal and depth adjustment of display
3. **FLAT BASE**
Unobtrusive design can be free standing or bolted to floor for increased safety and security



KIP540(-S)
KIP542(-S)
KIP546(-S)
KIP547(-S)
KIP555(-S)



KIP540B(-S)
KIP542B(-S)
KIP546B(-S)
KIP547B(-S)
KIP555B(-S)



KIL540(-S)
KIL542(-S)
KIL546(-S)
KIL547(-S)



ACC-F100



ACC-F200

PORTRAIT KIOSK ENCLOSURE
COLOR: Gloss black or silver

- Eight-way tool-less adjustment to quickly position display in kiosk window for a flush alignment
- Accommodates ultra-thin or deeper commercial displays up to 4" (101mm) thick, while accentuating slim kiosk design
- Secured front and back doors allow convenient access to the display, media player and other internal components for easy installation and maintenance
- Stand-alone kiosk enclosure or fully integrated with display, media player, power and thermal management, etc.
- Supports a wide range of aesthetic options including multiple colors, vinyl wraps, etc. to best match the environment or promote brand strategy
- Pre-assembled to simplify installation of entire solution

PORTRAIT BACK-TO-BACK KIOSK ENCLOSURE
COLOR: Gloss black or silver

- Eight-way tool-less adjustment to quickly position display in kiosk window for a flush alignment
- Accommodates ultra-thin displays up to 1.83" (46mm) thick to accentuate slim kiosk design
- Secured doors allow convenient access to the display, media player and other internal components for easy installation and maintenance
- Stand-alone kiosk enclosure or fully integrated with display, media player, power and thermal management, etc.
- Supports a wide range of aesthetic options including multiple colors, vinyl wraps, etc. to best match the environment or promote brand strategy
- Pre-assembled to simplify installation of entire solution

LANDSCAPE KIOSK ENCLOSURE
COLOR: Gloss black or silver

- Eight-way tool-less adjustment to quickly position display in kiosk window for a flush alignment
- Accommodates ultra-thin or deeper commercial displays up to 2.25" (57mm) thick, while accentuating a slim kiosk design
- Hinged top frame offers easy access to display and other internal components for easy maintenance and enhanced security
- Supports wide range of aesthetic options including multiple colors, vinyl wraps, etc. to best match environment or promote brand strategy
- Stand-alone kiosk enclosure or fully integrated with screen, media player, power and thermal management, etc.

LANDSCAPE COOLING FAN ASSEMBLY

- Dual Ball bearing cooling fan (1)
- Green Fan Cord with thermostat reduces energy costs by up to 66%
- Air Flow: 80 CFM
- Noise Level: 34dBA
- 110V
- RoHS Compliant

PORTRAIT COOLING FAN ASSEMBLY

- Dual Ball bearing cooling fans (2)
- Daisy Chain Green Fan Cord with thermostat saves up to 66% energy costs
- Air Flow: 80 CFM per unit
- Noise Level: 34dBA
- 110V
- RoHS Compliant

Display size	40" KIP540(-S) 42" KIP542(-S) 46" KIP546(-S) 47" KIP547(-S) 55" KIP555(-S)	40" Ultra-thin KIP540B(-S) 42" Ultra-thin KIP542B(-S) 46" Ultra-thin KIP546B(-S) 47" Ultra-thin KIP547B(-S) 55" Ultra-thin KIP555B(-S)	40" Ultra-thin KIL540(-S) 42" Ultra-thin KIL542(-S) 46" Ultra-thin KIL546(-S) 47" Ultra-thin KIL547(-S)
VESA® pattern	200 x 200 up to 800 x 400mm	200 x 200 up to 800 x 400mm	200 x 200 up to 600 x 400mm
Micro-adjustments	8-way tool-less adjustment	8-way tool-less adjustment	8-way tool-less adjustment
Horizontal display adjustment	Yes	Yes	Yes
Security	Yes	Yes	Yes
Max load	75lb (34kg)	150lb (68kg)	75lb (34kg)
Listings / Certifications	RoHS MADE IN USA	RoHS MADE IN USA	RoHS MADE IN USA



KioskBuilder™:
Build your own Integrated Kiosk @ kiosks.peerless-av.com including integration services, flat panel display, media player, content management software, power protection, thermal management, display protection, vinyl graphics, etc.



Antimicrobial Protection:
Agion® antimicrobial* finish available to assist in controlling the spread of infections.
Contact Peerless-AV Customer Care for more information.
*Antimicrobial protection is limited to the treated article and does not protect a user against disease causing bacteria. Always clean products thoroughly after each use.

KIOSK SOLUTIONS




KioskBuilder™:
Build your own Integrated Kiosk @ kiosks.peerless-av.com including integration services, flat panel display, media player, content management software, power protection, thermal management, display protection, vinyl graphics, etc.

Display size		40" Ultra-thin <small>KIP/KIL640(-S)</small>	42" Ultra-thin <small>KIP/KIL642(-S)</small>	46" Ultra-thin <small>KIP/KIL646(-S)</small>	47" Ultra-thin <small>KIP/KIL647(-S)</small>	40" Ultra-thin <small>KIP/KIL740(-S)</small>	42" Ultra-thin <small>KIP/KIL742(-S)</small>	46" Ultra-thin <small>KIP/KIL746(-S)</small>	47" Ultra-thin <small>KIP/KIL747(-S)</small>
VESA® pattern		200 x 200 up to 600 x 400mm				200 x 200 up to 600 x 400mm			
Micro-adjustments		8-way tool-less adjustment				8-way tool-less adjustment			
Horizontal display adjustment		Yes				Yes			
Security		Yes				Yes			
Max load		75lb (34kg)				75lb (34kg)			
Listings / Certifications									



KIP746-S shown



- 1. 8-WAY TOOL-LESS MICRO ADJUSTMENT**
Provides quick vertical, horizontal and depth adjustment of display
- 2. EXTENDABLE ARMS**
Allows easy installation and maintenance of display
- 3. REMOVABLE FRONT COVER**
Highly secure frame hinges open for easy installation and maintenance access

PORTRAIT MODELS:
KIP640(-S)
KIP642(-S)
KIP646(-S)
KIP647(-S)



Landscape model shown

PORTRAIT MODELS:
KIP740(-S)
KIP742(-S)
KIP746(-S)
KIP747(-S)



Portrait model shown

LANDSCAPE MODELS:
KIL640(-S)
KIL642(-S)
KIL646(-S)
KIL647(-S)

LANDSCAPE MODELS:
KIL740(-S)
KIL742(-S)
KIL746(-S)
KIL747(-S)


WALL KIOSK ENCLOSURE
COLOR: Gloss black or silver

- Eight-way tool-less adjustment to quickly position display in kiosk window for flush alignment
- Accommodates ultra-thin displays up to 2.25" (57mm) thick to accentuate slim kiosk design
- Low profile design extends 3.96" (101mm) away from the wall which meets the American with Disabilities Act (ADA) certification
- Hinged top frame offers easy access to display and other internal components for easy maintenance and enhanced security
- Supports wide range of aesthetic options including multiple colors, vinyl wraps, etc. to best match environment or promote brand strategy
- Stand-alone kiosk enclosure or fully integrated with screen, media player, power and thermal management, etc.

IN-WALL KIOSK ENCLOSURE
COLOR: Gloss black or silver

- Eight-way tool-less adjustment to quickly position display in kiosk window for flush alignment
- Accommodates ultra-thin displays up to 2.25" (57mm) thick to accentuate slim kiosk design
- Removable front cover and pull-out mount offers easy access to the display and other internal components for easy maintenance and enhanced security
- Low profile design extends 1.0" (25mm) away from the wall which meets the American with Disabilities Act (ADA) certification
- Supports wide range of aesthetic options including multiple colors, vinyl wraps, etc. to best match environment or promote brand strategy
- Stand-alone kiosk enclosure or fully integrated with screen, media player, power and thermal management, etc.

UNIVERSAL TABLET MOUNTS

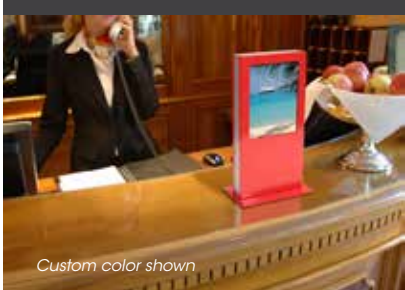

Custom color shown



PTM400S shown

- 1. UNIVERSAL**
Adjustable height and width, providing a universal fit for most tablets
- 2. VERSATILE**
±30° of One-Touch™ tilt and swivel and 360° of roll to achieve virtually any viewing angle
- 3. SLEEK AND STYLISH**
Two color options available for coordinating with tablet aesthetics
- 4. SECURE**
Option to place on desk or secure down with theft resistant security screws



PTM200



PTM400S(-W)



PTS510I(-S)(-W)



KIP410I(-S)

KIP410I Tablet accessory:




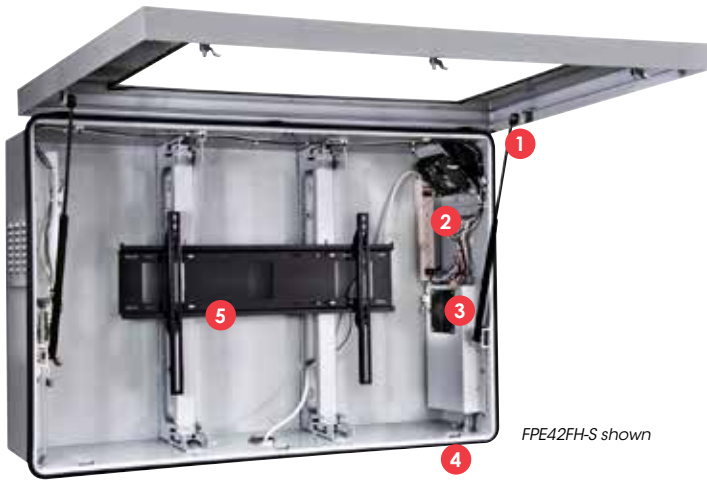
HCACC401
Battery (Single)

Additional accessories page 31

Tablet size		7.68" to 13.75" (195-349mm) <small>* tablet must be between 0.3"-0.75" deep</small>	7.68" to 13.75" (195-349mm) <small>* tablet must be between 0.3"-0.75" deep</small>	9.7" (24.63mm) <small>iPad, iPad2, and iPad3 with Retina display</small>	9.7" (24.63mm) <small>iPad, iPad2, and iPad3 with Retina display</small>
VESA® pattern		75 x 75mm	—	—	—
Distance from the wall		—	—	—	—
Tilt swivel roll		—	±30° One-Touch™ tilt ±30° 360°	Fixed 35° viewing angle	—
Landscape to portrait		—	Yes	Yes	—
Security		—	Yes	Yes	Yes
Max load		5lb (2.27kg)	5lb (2.27kg)	5lb (2.27kg)	5lb (2.27kg)
Listings / Certifications					

INDOOR/OUTDOOR PROTECTIVE ENCLOSURES





FPE42FH-S shown






1. EASY DISPLAY ACCESS
Gas struts deliver easy access to display for installation and maintenance

2. COMPONENT POWER
6 outlet 115V 15A surge protector to protect electronic components within enclosure

3. CIRCULATION FANS
Ensure proper air flow within the unit

4. RUBBER GASKET SEAL
Tested to IP56/NEMA4X standards, protects from dust, dirt and water

5. UNIVERSAL COMPATIBILITY
Unit includes Peerless-AV universal flat panel mount that accommodates flat panel displays with up to 600 x 400mm VESA® mounting pattern

		 	
FPE42F/47F/55F(H)-S	FPEWM	FPECMC/FPECMI models	FPEPM models
<p>PROTECTIVE ENCLOSURE COLOR: Stone Gray</p> <ul style="list-style-type: none">Specifically designed to protect flat panel displays year round in public areas such as schools, courtyards, stadiums, hallways, cafeterias, gymnasiums or quadsProtect flat panel displays from rain, snow, dust, vandalism and wet washingClimate controlled circulation fans and heaterSolid steel construction with corrosion resistance and integrated security locks	<p>TILT WALL MOUNT FOR PEERLESS-AV PROTECTIVE ENCLOSURES COLOR: Stone Gray</p> <ul style="list-style-type: none">Constructed from corrosion resistant materials, primed with an eCoat and includes stainless steel hardwareHook-and-hang design helps attach enclosure to mount and hold the weight load while fine tuning tilt adjustments	<p>CONCRETE AND I-BEAM CEILING MOUNTS FOR PEERLESS-AV PROTECTIVE ENCLOSURES COLOR: Stone Gray</p> <ul style="list-style-type: none">Constructed from corrosion resistant materials, primed with an eCoat and includes stainless steel hardwareHook-and-hang design helps attach enclosure to mount and hold the weight load while fine tuning tilt adjustments1', 2', 3' or 4' pole length optionsInternal cable managementI-beam model adjusts for 5.45"-12.45" I-beam flanges	<p>PEDESTAL MOUNT FOR PEERLESS-AV PROTECTIVE ENCLOSURES COLOR: Stone Gray</p> <ul style="list-style-type: none">Constructed from corrosion resistant materials, primed with an eCoat and includes stainless steel hardwareHook-and-hang design helps attach enclosure to mount and hold the weight load while fine tuning tilt adjustments5', 6', 7' or 8' pedestal height optionsInternal cable management
Accessories page 31			

Display size	40" to 42" 46" to 47" 52" to 55" <i>FPE42F(H)-S FPE47F(H)-S FPE55F(H)-S</i>	Only for use with Peerless-AV Enclosures		
Adjustable mounting pattern (W x H)	730 x 433mm (28.75" x 17.05")	Not adjustable; 406 x 406mm (16" x 16")		
Distance from the wall, ceiling or floor	11.68" (297mm) <i>(from the wall)</i>	6.26" (159mm) <i>(from the wall)</i>	1', 2', 3' or 4' pole length options <i>(from the ceiling)</i>	5', 6', 7' or 8' pedestal height options <i>(from the floor)</i>
Tilt swivel	—	+20° 0° <i>(at 4° increments)</i>	+20° 360° <i>(at 4° increments)</i>	+15° 360° <i>(at 3° increments)</i>
Security	Includes stainless steel key lock	Yes		
Max load	250lb (113kg)	400lb (181kg)		
Ambient Temperature Exposure Unheated Models	41° - 95° F (5° - 35° C)	—		
Ambient Temperature Exposure Heated Models	5° - 95° F (-15° - 35° C)	—		
Max Power Load Unheated Models	1550 WATTS	—		
Max Power Load Heated Models	700 WATTS	—		
Listings / Certifications	  	  		

WIND RATED MOUNTS FOR OUTDOOR DISPLAYS









ECMU-04-C-S shown

1. POLE LENGTH OPTIONS
Four pole length options available for varied drop down requirements

2. SIMPLE SET-UP
Hook-and-hang design helps make installation quick and easy

3. VIEWING ANGLE FLEXIBILITY
Incremental tilt settings enable the best viewing angle

	 	
EWMU(-S)	ECMU-01/02/03/04-C(-S) ECMU-01/02/03/04-I(-S)	EPMU-05/06/07/08(-S)
<p>WIND RATED WALL MOUNT COLOR: Black or stone gray</p> <ul style="list-style-type: none">Wind rated up to 110 mph, elevation 200ft (60m), Category "D"Fixed incremental tilt with angle settings at 0°, 2°, 5°, 10° or 15°Hook-and-hang design for simplified installationConstructed from corrosion resistant materials, primed with an eCoat and includes stainless steel hardware	<p>WIND RATED CONCRETE AND I-BEAM CEILING MOUNT COLOR: Black or stone gray</p> <ul style="list-style-type: none">Wind rated up to 90 mph, elevation 200ft (60m), Category "D"Internal cable managementHook-and-hang design for simplified installationConstructed from corrosion resistant materials, primed with an eCoat and includes stainless steel hardware1', 2', 3' or 4' pole length optionsI-beam model adjusts for 6" -12" I-beam flanges	<p>WIND RATED PEDESTAL MOUNT COLOR: Black or stone gray</p> <ul style="list-style-type: none">Wind rated up to 110 mph, elevation 200ft (60m), Category "D"Internal cable managementHook-and-hang design for simplified installationConstructed from corrosion resistant materials, primed with an eCoat and includes stainless steel hardware5', 6', 7' or 8' pedestal height options
Accessories page 31		

Display size	32" to 65"	32" to 65"	32" to 65"
VESA® pattern	600 x 400mm	600 x 400mm	600 x 400mm
Adjustable mounting pattern (W x H)	720 x 449mm (28.35" x 17.67")	720 x 449mm (28.35" x 17.67")	720 x 449mm (28.35" x 17.67")
Distance from the wall, ceiling or floor	3.79" (96mm) <i>(from the wall)</i>	1', 2', 3' or 4' pole length options <i>(from the ceiling)</i>	5', 6', 7' or 8' pedestal height options <i>(from the floor)</i>
Tilt rotation	+15° —	+15°/-5° 360° (22° increments)	+15°/-5° 360° (22° increments)
Horizontal display adjustment	8" (203mm)	—	—
Landscape to portrait	Yes* <small>* Requires display to be removed and reset on mount. Limited to displays with a maximum 400 x 400mm VESA® pattern.</small>	Yes* <small>* Requires display to be removed and reset on mount. Limited to displays with a maximum 400 x 400mm VESA® pattern.</small>	Yes* <small>* Requires display to be removed and reset on mount. Limited to displays with a maximum 400 x 400mm VESA® pattern.</small>
Security	Yes	Yes	Yes
Max load	200lb (91kg)	200lb (91kg)	200lb (91kg)
Listings / Certifications	  	  	  

CUSTOM CONFIGURED AV RACKS FROM PEERLESS-AV®

Our complete family of AV Racks features a modern, streamlined design with an ease-of-use and flexibility that fits any commercial use. We offer built-to-order custom solutions via an online configurator tool that enables users to specify the precise location of each component, view a CAD drawing with all accessories installed, and examine a rotating 3D model to ensure satisfaction with the design before submitting it for a same-day quote. Models range in size from 8 to 44 RUs and are available in 10 colors with a wide variety of options.



SELF-SERVICE CONFIGURATION







Use our online **Rack Configurator** application to build your own rack, select a pre-configured rack or customize with accessories.

With Peerless-AV, you'll receive:

- 3D model to view the rack design before you order
- Drawing of all accessories shown as mounted in your rack
- Accessory order configuration
- One part number for each configured rack
- Complete bill of materials, including part numbers, descriptions, quantities and shipping weights
- Dedicated Customer Care team to assist you with any questions

Configure your custom rack now @ racks.peerless-av.com



CFR	BFR	EFR	QER	FFR
CHAMPION PREMIER FRAME RACKS	STANDARD FRAME RACKS	ENCLOSED FRAME RACKS	QUICK & EASY FRAME RACKS	FURNITURE FRAME RACKS
Optimal rack for larger cabling requirements – featuring open sides for easy access to electronic equipment. Wider main channels are perfect for a variety of AV components.	Open sides offer access to electronic equipment. Heavy-duty caster base designed for stability and mobility with two removable rear plates at the top and base for electrical wiring.	Built-in vented solid side panels offer a polished look. Two removable rear plates are incorporated into the rack, top and base easy access to electrical wiring.	Cost-effective, space-saving design provides a secure mounting solution for all AV equipment. Open frame design saves valuable installation time.	Low-profile, open racks perfect for mounting AV equipment in smaller spaces. Offers the maximum amount of room in a minimal, space-saving design.
<ul style="list-style-type: none">• 44RU / 40RU / 37RU / 24RU• Fully welded 24" (609mm) wide with rack depths of 27.5" (698mm) and 32.5" (825mm)• Open sides for large cabling requirements and easy access to electrical equipment• Fast and easy installation of a full line of accessories	<ul style="list-style-type: none">• 44RU / 40RU / 37RU / 24RU• Fully welded 22" (568mm) wide with rack depths of 26.5" (673mm), 31.5" (825mm), 36" (919mm) and 42" (1066mm)• Open sides for easy access to electrical equipment• Fast and easy installation of a full line of accessories	<ul style="list-style-type: none">• 44RU / 40RU / 35RU / 27RU / 21RU / 18RU• Fully welded 22" (558mm) wide with rack depths of 20" (508mm) and 25" (635mm)• Incorporates vented non-removable solid side panels• Fast and easy installation of a full line of accessories	<ul style="list-style-type: none">• 43RU / 37RU / 29RU / 21RU / 14RU / 8RU• Quick and easy to assemble saving the installer valuable time on the job site• Open frame design provides stability and makes assembly quick and easy• Full line of accessories to expand capability of rack	<ul style="list-style-type: none">• 14RU / 13 RU / 12 RU / 11 RU / 10RU / 9 RU / 8RU• Low profile open rack perfect for AV equipment inside lecterns, credenzas and entertainment systems• Fully welded 19.25" (488mm) wide with rack depths of 26.5" (673mm), 16" (406mm) and 18" (457mm)• Full line of accessories to expand capability of rack
 Max load				
12,250lb (5557kg)	12,250lb (5557kg)	12,250lb (5557kg)	600lb (272kg)	400lb (181kg)
Listings / Certifications				
    				

Visit us at racks.peerless-av.com to view full line of rack accessories including doors, panels, drawers, shelves, chassis guides, cooling options, lacing bars, power strips and casters.



CUSTOM RACKS DELIVERED

Trust your electronic components with the same award-winning design and manufacturing excellence that the world's largest companies have been trusting for over 40 years: Peerless-AV. Quality and convenience guaranteed. All racks* ship fully assembled within two weeks of the order and are proudly made in the U.S.A. for rapid delivery.

*except the knock-down models



THE POWER TO BROADCAST

A Digital Signage integrator's dream, the Pico Broadcaster broadcasts HD content to an unlimited number of DTVs that have an ATSC tuner and over-the-air antenna within a 350ft (106m) radius. The Pico Broadcaster accepts content from a computer or media player with IP transport stream output capabilities then broadcasts the signal to any open 'white-space' channel local to the area. The Pico Broadcaster is not only a convenient, powerful and flexible media distribution system, but is the most cost effective media device for a Digital Signage application.

Uses over the air broadcast technology to deliver high-quality media

Quick, easy and wireless Digital Signage delivery up to 350ft (106m) radius

Delivers virtually any media format to an unlimited number of DTVs

Content management made easy with network connectivity



HDS-PB100

PEERLESS™ PICO BROADCASTER

- Long range wireless transmission of an omni-directional broadcast signal up to a 350ft (106m) radius
- Streams HD broadcast quality content onto white space channels to an unlimited number of DTVs within effective range
- LAN port for Transport Stream input, network/internet connectivity, as well as local and remote control of content
- Includes Streaming Media Server software to transcode virtually any media format to MPEG2 broadcast format
- Adjustable power output setting to match installation requirements
- Web based graphical user interface for ease of configuration
- Configurable IP addresses for system control and setup to join any pre-existing network
- FCC compliant broadcast device which includes first year of FCC licensing subscription
- Mounting flanges for affixing unit securely to a wall or ceiling

Accessories page 31

Wireless Technology

Over-the-air broadcasting on 'white-space' channel over UHF 500-700 MHz frequencies

Wireless Transmission Distance

350ft (106m) (transmission distance may be tuned down to meet project needs)

Multi-Screen Capabilities

Broadcast to unlimited number of DTVs within the transmission distance

Input Connections


1 - Ethernet
1 - USB (for servicing)
1- DB9 (RS-232 for servicing)

Output Connections

Broadcast signal is received by antenna and ATSC tuner


Primary Applications

Digital Signage applications requiring wireless content delivery for distances up to 350ft (106m)
Ideal for dynamic environments where any number of displays may need to be repositioned from time to time

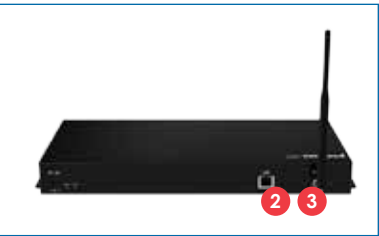

Pico Broadcaster back

- 1. SCALABLE BROADCAST TECHNOLOGY**
Transmits HD broadcast quality signals to an unlimited number of HDTVs within a 350ft (106m) radius
- 2. CONTROL OPTIONS**
LAN port provided for access to internal settings
- 3. CONNECTIVITY**
LAN port connects device to local area network via Cat5 cabling for signal transfer
- 4. MOUNTING FLANGES**
Conveniently slotted flanges for quick and easy mounting
- 5. NOTIFICATION**
Indicator lights provide system operation status

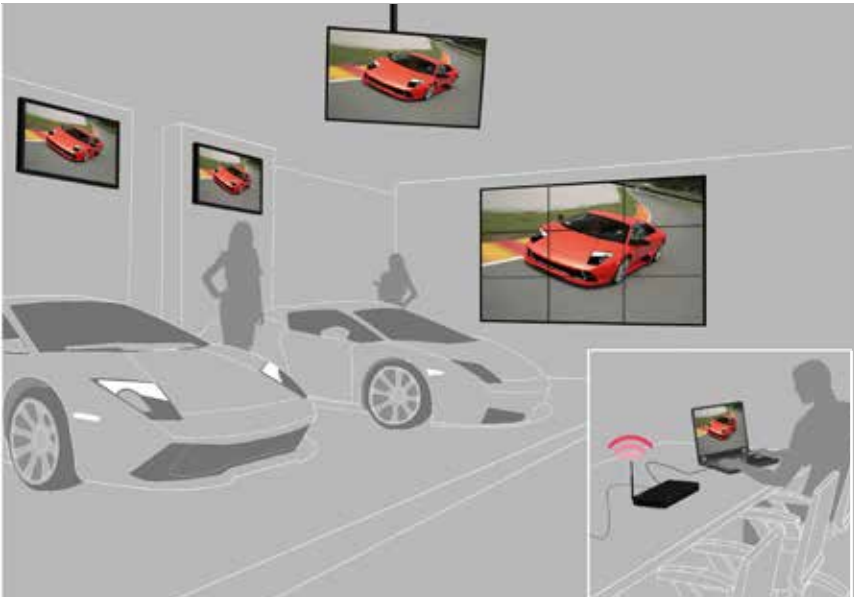

PEERLESS-AV® STREAMING MEDIA SERVER

Simple-to-use interface easily streams multimedia content to the Pico Broadcaster

- Drag-and-drop functionality enables easy playlist creation
- Converts virtually any file format to MPEG2 to meet broadcasting standards
- Delivers multimedia content to Pico Broadcaster



ONE SOLUTION, ENDLESS POSSIBILITIES.

HD Flow™ Pro is simply the most versatile wireless solution for digital signage applications. Get full HD 1080p wherever it's needed with no strings attached. This highly flexible wireless solution provides endless possibilities, working with both digital and analog signals, with any AV or IT device. It easily streams high definition content through walls, floors and ceilings to flat panels or projectors up to 131ft (30m). In addition, the HD Flow Pro multicasts to up to four displays, perfect for multi-screen digital signage content delivery. This wireless workhorse is a project-saving kit for new installations and retrofits alike.



The most flexible wireless HD solution, works with both analog and digital AV/IT sources

Streams Full HD content to up to four displays at once

No more being tethered to cables - install anywhere, anytime



HDS200



HDS200-2
Multicast: Two Receivers



HDS200-3
Multicast: Three Receivers



HDS200-4
Multicast: Four Receivers

HD FLOW™ PRO WIRELESS MULTIMEDIA KIT
COLOR: Gloss black

- Full HD 1080p (60Hz) (24/30/60 fps) and passive 3D signal flow, ideal for ultra-fast signal streaming
- Long range, high-quality streaming up to 131ft (40m) with no reduction of picture quality
- Multicast up to four HD Flow™ Pro Wireless Receivers*
- Instant real-time transmission of Full HD media
- Transmits through walls, floors and ceilings for multi-room streaming capability
- The HD Flow™ Pro (802.11n) private network resists interference and network sharing from nearby wireless routers
- Built-in IR does not require line-of-sight placement to control source devices such as DVR/set-top box, satellite receiver, Blu-ray®/DVD player, media server, VCR or game console
- HDCP compliant
- Plug-and-play setup requires no software or driver installation

* Requires additional receiver units

Additional accessories page 31

Wireless Technology	Wi-Fi, 802.11n (dynamic frequency selection), 5.15-5.25 GHz
Wireless Transmission Distance	131ft (40m)**
Multi-Screen Capabilities	1 Transmitter, up to 4 Receivers***
Input Connections	2 - HDMI 1 - Composite 1 - 3.5mm Audio 1 - IR IN (Receiver) 1 - VGA (Component with provided adapter) 1 - LAN 1 - USB (Service port only on Receiver)
Output Connections	1 - HDMI 1 - Composite 1 - Component 1 - 3.5mm audio 1 - IR Out (Transmitter) 1 - LAN
Primary Applications	Commercial use where digital or analog devices are to be used as sources for secure wireless AV streaming through walls, floors and ceilings; ideal system for multicast applications when delivering AV content to up to four displays***.






**Transmission distance depends on actual environment. Expressed distance is based on line-of-sight measurement. Obstructions constructed of steel, wood, concrete or brick may decrease transmission distance.

***Additional Receivers (HDS200-R), programming required when adding receivers to an already existing system. Multicast systems HDS200-2,-3,-4 ship pre-programmed.




- 1. ROBUST SIGNAL**
Confirms that the 802.11n private network has been set up and is ready for Full HD 1080p and passive 3D wireless signal streaming
- 2. INPUT CONNECTIVITY**
Plug in up to five (5) AV source devices and easily switch between them with the included remote control
- 3. OUTPUT CONNECTIVITY**
Four (4) output port options available — ideal for virtually any output device
- 4. SOURCE CONTROL**
Built-in IR controls source devices without need for line-of-sight device placement
- 5. SMALL FOOTPRINT**
Small footprint makes it easy to fit the HD Flow Pro units into any application

ACCESSORIES

				
HDS200-R	HDS-ASE	HDS-IRE	EC-HD Models	DE-HD Models
HD FLOW™ PRO WIRELESS MULTIMEDIA RECEIVER COLOR: Gloss black <ul style="list-style-type: none">• Expands HDS200,-2,-3 to wirelessly stream high definition content to up to 4 displays• Optional IR Extender (HDS-IRE) enabling control of components from receiver location	WIRELESS SECURITY ENCLOSURE FOR USE WITH HD FLOW MODELS <ul style="list-style-type: none">• Theft protection for HDS Flow Pro Transmitter or Receiver units with security screws and hidden mounting hardware for enhanced security• Two-piece design for quick and easy installation• Mounts to any flat surface such as desktop or wall• Offers visibility of front indicator lights and toggle button• HD Flow Pro device can be removed for maintenance without un-installing enclosure	IR EXTENDER <ul style="list-style-type: none">• Hide HD Flow Receiver in a stand or mount it behind the TV while maintaining IR functionality for remote components• Discreet appearance ideal for blending into any environment• Compatible with all models of HDS100/200 <p><i>Cord Length: 3ft (0.91m) lead</i> <i>Connection Type: 3.5mm plug</i> <i>Range: up to 22ft (6.71m) range from remote control to IR Extender</i></p>	EC-HD015F 1.5ft (0.5m) High Speed HDMI Cable with Ethernet EC-HD025F 2.5ft (0.75m) High Speed HDMI Cable with Ethernet EC-HD03F 3ft (1m) High Speed HDMI Cable with Ethernet	DE-HD0075B Delta 2.5ft (0.75m) Premium High Speed HDMI Cable with Ethernet DE-HD01B Delta 3ft (1m) Premium High Speed HDMI Cable with Ethernet

Note: Requires HDS200,-2,-3 kit to operate.

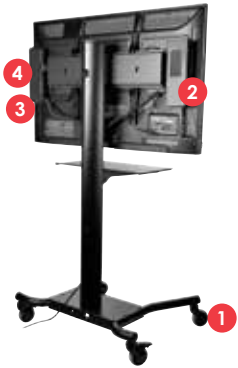

1. CONVENIENCE OF MOBILITY
- 4" swivel casters enable safe and easy maneuverability over various flooring surfaces and through doorways. Two locking casters ensure complete stability wherever the cart is placed
2. WIRELESS FULL HD 1080P AND 3D STREAMING
- Cable-free high-definition and passive 3D signal streaming up to 131ft (40m) through floors, walls and ceilings
3. REMOTE COMPONENT CONTROL
- Source device control is made simple with a built-in IR back channel. No matter where the components are stored they can be controlled at the display location
4. CLEAN APPEARANCES
- Provides 3-tap grounded outlet for wireless components and display power allowing for only one power cable to be routed to the power outlet



Includes everything needed to quickly and easily stream wireless content to the display without the need to run signal cables

WL-SR560M-200

PEERAIR™ WIRELESS CART FOR 47"-65" DISPLAYS


- Includes everything needed to mount and stream wireless Full HD 1080p and passive 3D content to the mounted display through walls, floors or ceilings
- Vertical adjustment feature to achieve ideal viewing height
- Internal cable management neatly hides all cords and cables for a clean, clutter-free look
- Includes IR Extender for enhanced remote control of source components
- Adjustable metal shelf for remote control placement
- Includes two 2.5ft (0.75m) HDMI cables for clean, fast and easy connectivity
- Built-in 3-tap grounded outlet for wireless components and display power allowing for only one power cable to be routed to the power outlet
- 4" swivel casters with two locking casters ensure stability, safety and easy maneuverability
- Provides excess display power cable, and wireless component cable storage for a clean look
- Quick and easy assembly and plug-and-play wireless set-up

Accessories page 31

Wireless Range up to 131ft (40m)	Latency < 30ms	WiFi Frequency 5.15~5.25GHz
47"-65"		
up to 600 x 400mm		
729 x 433mm (28.70" x 17.05")		
-2°, 0°, +5° 360° —		
250lb (113kg) 150lb (68kg) display; 50lb (22kg) each shelf		

Complete Line of Wireless Mounting Solutions

Powered by the HD Flow™ Pro Wireless Multimedia Kit, these wireless mounts are not only purpose-built mounting devices, they are versatile wireless solutions. All components are provided to allow easy integration to the display, making it easy to set up content to the display without any cables, while creating an impressive technological wonder.

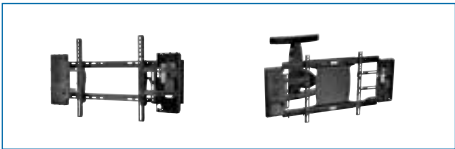

Wireless Wall Mounting Solutions



Wireless Mobile & Projector Mounting Solutions



Wireless Outdoor Mounting Solutions

Visit peerair.peerless-av.com to view complete line of Wireless Mounting Solutions.

CABLES

DEB-CV05/10/15/20	DEB-HD10	SLW-HDRU05 SLW-HDRZ05
HIGH PERFORMANCE COMPONENT AUDIO VIDEO CABLE	HIGH SPEED HDMI® CABLE WITH ETHERNET	HIGH SPEED HDMI® CABLES WITH ETHERNET FOR REAR MOUNTED CONNECTIONS
<ul style="list-style-type: none">Exacting cable geometry delivers outstanding sound quality and clarityHD 1080i/720p compatible24K gold-plated contacts for superior signal transferColor coded connector ends identify red, green or blue signal conductor	<ul style="list-style-type: none">3DTV compatible (stereo 1080p image resolution)Ethernet channel for connecting Internet-enabled AV devices minimizing cablingAudio return channel eliminates need for additional audio cable between display with integrated receiver and amplifierSupports 4k x 2k image resolutions (2160p) and FULL HD (1080p) compatibleIncreased color profile support for digital cameras	<ul style="list-style-type: none">Right-angled HDMI® connector projects only 14mm from rear of display's HDMI socket (plug inserted)Ultra slim flat cable 3mmRight angled (90°) HDMI connection fits the vast majority of flat panel displays with a horizontal HDMI socket (SLW-HDRU05)Right angled (270°) HDMI connection fits the vast majority of flat panel displays with side mounted HDMI sockets (SLW-HDRZ05)
Lengths 16' (5m) / 32' (10m) / 49' (15m) / 65' (20m)	32' (10m)	16' (5m)

SURGE PROTECTORS



PVP3000-PL8

EIGHT OUTLET SURGE PROTECTOR

- Protection Indicator Lights – Green and red LED indicator lights confirm components are protected
- Master Outlet – Continuously powered and controls both power save outlets
- Energy Saver Outlets – Power based on master outlet status
- Network/Phone (RJ45/RJ11) Combo Jacks – Network or phone line surge protection
- DSS/Coax Connectors – Gold-plated connectors provide surge protection for cable, DSS and cable modems
- EMI/RFI Noise Filter – Noise filtering for enhanced component performance

Number of Outlets	8
-------------------	---

ACCESSORIES

DCS400 Multi-display Structural Ceiling Stress Decoupler	DCT300 Multi-display Truss Ceiling Stress Decoupler	DCT500/600/700/800/900 Multi-display I-beam Clamps	ACC600 Multi-display Interface Bracket	CMJ470/480/490 Ceiling Plates Additional ceiling plates available, visit peerless-av.com	PLCM-2 Dedicated Ceiling Base Mount for PLCM-UNL[1]-[CP]	MIS-ACC201 Double Stack Box Accessory	ACC604 Dual-display Cartridge for Flat Panel Stand, FPZ-600
RMI1 Landscape to Portrait Accessory	ACC615 Metal Stud Fastener Kit - 6 togglers	ADD models Fixed or Adjustable Extension Columns for Ceiling Decouplers Visit peerless-av.com	EXT models Fixed Extension Columns Various lengths available. Visit peerless-av.com	AEC models Adjustable Extension Columns Various lengths available. Visit peerless-av.com	ACC325 Accessory Shelf for Flat Panel Stand, FPZ-600	ACC330 AV Component Shelf for Flat Panel Stand, FPZ-640	ACC833 Equipment Accessory Shelf for Pedestal Mount, COL510P-810P
PLP-UNL Display Adaptor Plate Additional display adaptor plates available, visit peerless-av.com	PLP-V4X2 Display Adaptor Plate	ACC-V800X VESA® 800 x 400mm Adaptor	ACC310 Feet Accessory for SR560M/G and WL-SR560M-200 models	ACC324(-S) Corner Mount Shelf for CM650[-S], CM60[-S], CM50[-S]	ACC320 Electrical Outlet Strip with Cord Wrap for SR560M/G and WL-SR560M-200 models	ACC319 Video Conferencing Shelf for SR560M/G and WL-SR560M-200 models	ACC315 Base Shelf for SR560M/G and WL-SR560M-200 models
							CL-SCG200 Screen cleaning gel



digitalsignage.peerless-av.com



LIT-0404 Rev.6

© 2013 Peerless Industries, Inc. Peerless-AV® is a registered trademark of Peerless Industries, Inc. All rights reserved.
Other parties' marks are the property of their respective owners.

peerless-av.com
800-865-2112