

92-401-KIT-E (Kit)

Multi-Color Kit 5 Meter Roll, **300** 3-Chip L.E.D's

KIT INCLUDES:

- 5 Meter Strip (16 ft.) RGB Roll
- IR Remote & Controller (16 Preset Colors)
- 6 Amp, 12V DC Power Supply

92-401-RGB-E (Only Roll)

Multi-Color 5 Meter Roll, **300** 3-Chip L.E.D's

SPECIFICATIONS:

- 2 Amps (24 Watts) Consumption
- Runs on 12V DC Power Supply
- 3M Adhesive Tape
- Width of Strip 10mm
- 16 Preset Colors with Controller



SINGLE COLOR L.E.D LIGHTING



92-401-COLOR-KIT

Single Color 5 Meter Roll, **300** 3-Chip L.E.D's

KIT INCLUDES:

- 5 Meter Strip (16 ft.) RGB Roll
- L.E.D Dimmer
- 6 Amp, 12V DC Power Supply

92-401-COLOR-E

Single Color 5 Meter Roll, **300** 3-Chip L.E.D's

SPECIFICATIONS:


- 2.5 Amps (30 Watts) Consumption
- Runs on 12V DC Power Supply
- 3M Adhesive Tape
- Width of Strip 10mm
- Dimable L.E.D's
- **WH** (6000K), **WW** (3000K)

Available Colors: **BU** **WH** 6000K **WW** 3000K





L.E.D ALUMINUM HOUSING

Suitable for any rigid or flexible LED strip with 10mm wide PCB or any PCB narrower than 10mm.





92-310

4 Feet RECTANGLE Aluminum Housing. Surface Mount.





92-311

4 Feet RECTANGLE Aluminum Housing. Flush Mount.




92-312

4 Feet TRIANGLE Aluminum Housing. 45 Degree Angle.




92-310-SLIM

4 Feet RECTANGLE Slim Aluminum Housing. Surface Mount.



92-311-SLIM

4 Feet RECTANGLE Slim Aluminum Housing. Flush Mount.



L.E.D PUCKS & BAR LIGHT



92-302-WW-PC
WARM WHITE L.E.D PUCK LIGHT

UL | 12VDC | 1W CREE LED | Warm White | 240LM



92-302-WH-PC
COOL WHITE L.E.D PUCK LIGHT

UL | 12VDC | 1W CREE LED | Cool White | 270LM



92-302-RGB-PC
RGB L.E.D PUCK LIGHT

12VDC | 1W RGB

NOTE! L.E.D Pucks Mount on a Surface or Flush Mount.





92-303-WW-300 (WARM WHITE) SUPER THIN L.E.D BAR LIGHT

Our Thin LED Rigid Bar Light is your perfect solution for under cabinet LED lighting, for task and accent lighting. This fixture can be used for any application between 1.5- 6ft, You'll find these low-energy LED fixtures to be efficient and functional, consumes only 8 watts of energy.

CALRAD...[®] ELECTRONICS 92-SERIES

L.E.D Lighting & Accessories

Brighten UP YOUR PROJECTS

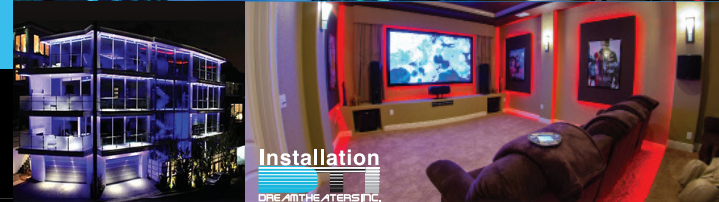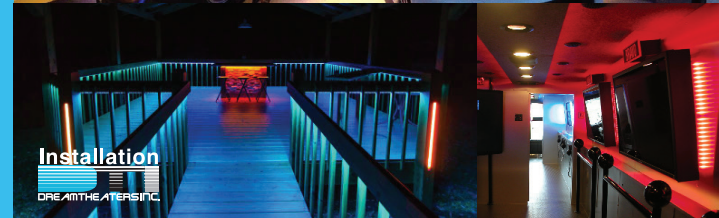


L.E.D LIGHTING



CALRAD ELECTRONICS

819 N. Highland Ave. Los Angeles, CA 90038
Tel: (323) 465-2131 | Fax: (323) 465-3504 | www.CALRAD.com

RGB L.E.D LIGHTING

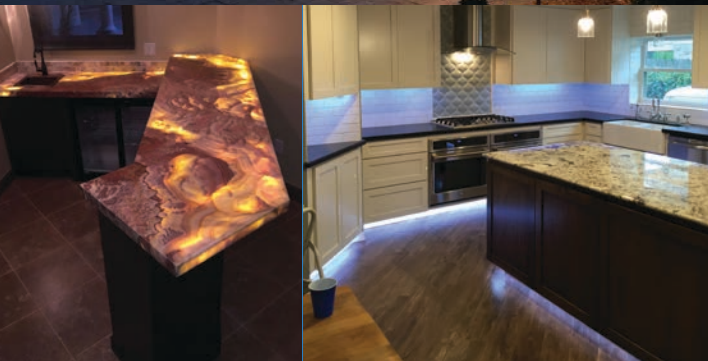

Installation



MediaTech
INTELLIGENT
SYSTEMS

L.E.D LIGHTING ACCESSORIES

Single Color Strips RGB Strips



92-322
2-Wire Direct Connector Clamp



92-333
RGB Direct Connector Clamp



92-328
RGB 90 Degree Coupler



92-327
Flexible Coupler 2-Wire 1.5" long



92-325
2-Wire L.E.D Strip to Power 5" long



92-320
Flexible Coupler 2-Wire 5" long



92-335
Adaptor Cable to Power Plug 6 in. long



92-334
Adaptor Cable to Power Jack 6 in. long



92-321
RGB Flexible Coupler 4-Wire 5" long



92-332
RGB Flexible Strip Connector Clamp 8" long



92-350
4 Wire RGB to Cable Clamp



92-351
4 Pin RGB "Y" Cord to 2 Cable Clamps



92-338
1 x 4 Power Splitter Cable 20" long



92-339
1 x 2 Power Splitter Cable 20" long



92-370
L.E.D Lighting Manual Control, "Single Color Only" 4 Amp



92-370-RF
L.E.D Lighting RF Control with Remote "Single Color Only" 6 Amp



92-372
L.E.D Lighting Manual Control, "RGB Only" 6 Amp



92-372-RF
L.E.D Lighting RF Control with Remote "RGB Only" 6 Amp



92-342
L.E.D Lighting Knob Dimmer, "Single Color Only" 4 Amp



92-346
Knob Dimmer 8 Amp



92-371
Single Color Wallplate Touch Controller



92-358
RGB Wallplate Touch Controller



92-341
Lighting IR Control Module with Remote



92-354
RGB Power Amplifier 72 Watts



92-348
RGB IR Controller with Remote 144 Watts



92-348-RF
RGB RF Controller with Remote 144 Watts



92-353
RGB Power Amplifier 144 Watts



92-353-HG
RGB HG Power Amplifier 12/24V 576 Watts



92-336
PIR Motion Sensor Switch 8 Amp



92-343
ON/OFF Compact Power Supply In Line Switch



92-344
ON/OFF Compact Power Supply 1 by 2 InLine Switch



92-345
IR Sensor Switch for LED lighting. Sensor range 25cm 36W/12V DC.



30-333T
DC 2.1mm female jack to 2 pin screw terminal block adapter. Excepts up to 18 Awg wire.



30-373T
DC 2.1mm male plug to 2 pin screw terminal block adapter. Excepts up to 18 Awg wire.



40-690
Rocker Switcher 6 Amps, 12V DC, mounts in 3/4" hole. SPDT-ON/ON



45-763-SW
12V DC, 800 mA L.E.D. Lighting Power Supply (For Runs Under 2 FT.)



45-602-2AMP
12V DC, 2 Amp L.E.D. Lighting Power Supply



45-608
12V DC, 5 Amp L.E.D. Lighting Power Supply



45-608-HG
12V DC, 6 Amp L.E.D. Lighting Power Supply



45-609-HG-UL
12V DC, 29 Amp L.E.D. Lighting Power Supply



55-780
3-Prong Stripped and Tinned end, 16 Gauge Wire, 6 Feet.



45-DPS Series
12V Dimmable Power Supply

45-60-DPS: 60 watts
45-100-DPS: 100 watts
45-200-DPS: 200 watts
45-250-DPS: 250 watts
45-300-DPS: 300 watts
 Working Temp.: < 158°F / 70°C
 (104°F / 40°C Ambient Temp.)
 Minimum Load: None
 Warranty: 5 Year Limited