

JVC

LX-NZ30B/W

4K 3,300 LUMEN LASER DLP

So Easy. So Exciting. All the Time.



The JVC LX-NZ30 4K Laser HDR DLP Projector features an ultra-bright 3,300 lumen laser light source, and a compact design, making it ideal for a wide range of viewing environments. An ultra low latency design that supports 1080p/240Hz with DisplayPort 1.2 makes it ideal for gaming.

- 3,300 Lumen BLUEscnt laser phosphor light source
- 2nd Generation .47" TRP DMD technology provides 4K (3840x2160) resolution
- 1080p/240Hz capability
- Up to 6.25ms ultra-low latency
- 100% REC 709 Color Space (BT2020 compatible)
- Wide lens shift range (V +/- 60%, H +/- 23%)
- Lens: 1.6X Wide Zoom (1.36:1 - 2.18:1)
- ∞:1 Contrast with Dynamic Laser Dimming
- Auto Picture mode for 4K HDR10 content
- 18Gbps HDMI/HDCP 2.2 Compatible Inputs
- DisplayPort 1.2, USB Inputs
- 3D Electronic Keystone, Corner Adjust & Warping
- Control: RS232/LAN/12V Trigger
- Compact Design: 13 1/8" L x 15 7/8" W x 5 1/4" H, 13.89 lbs.
- 2 Year Parts & Labor Warranty

4K
UHD

DLP
TEXAS INSTRUMENTS


HDR
High Dynamic Range

BLUEscnt

Specifications

LX-NZ30B/W	
Imaging device	2 nd Generation 0.47 TRP DMD
Resolution	3840 x 2160 (TRP)
Brightness (Max)	3300 Lumens
Contrast Ratio	∞:1 (Dynamic)
Color Space	100% of Rec. 709 (BT.2020 Compatible)
Light Source	BLU-Escent Laser Phosphor
Laser life	20,000 Hours (High Power Mode)
Lens	1.6X (Manual Zoom & Focus)
Throw Ratio	1.36:1-2.18:1
Lens Shift	(V +/- 60%, H +/- 23%)
HDR	Yes (HDR10, HLG)
Terminals	HDMI x2, Max. Resolution 3840 X 2160 4K 60p (4:4:4 8 bit/4:2:2 12 bit, HDCP 2.3), DisplayPort 1.2, USB-C, USB-A (Service), RS232, LAN, 12V Trigger
Dimensions (WxDxH-inches)	15 7/8 x 13 1/8 x 5 1/4 (with feet & lens)
Weight (net) (lbs)	13.89


Connectors

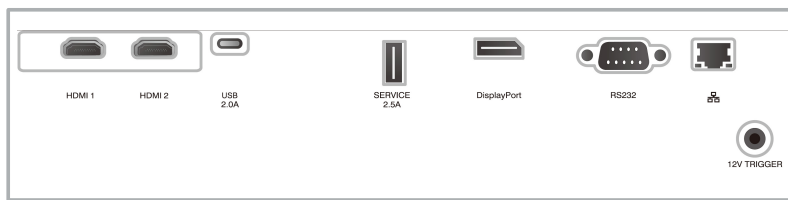

External Dimensions

405 mm x 332 mm x 134 mm (15 • 7/8" x 13 • 1/8" x 5 • 1/4") (W x D x H)

Unit: mm (inches)

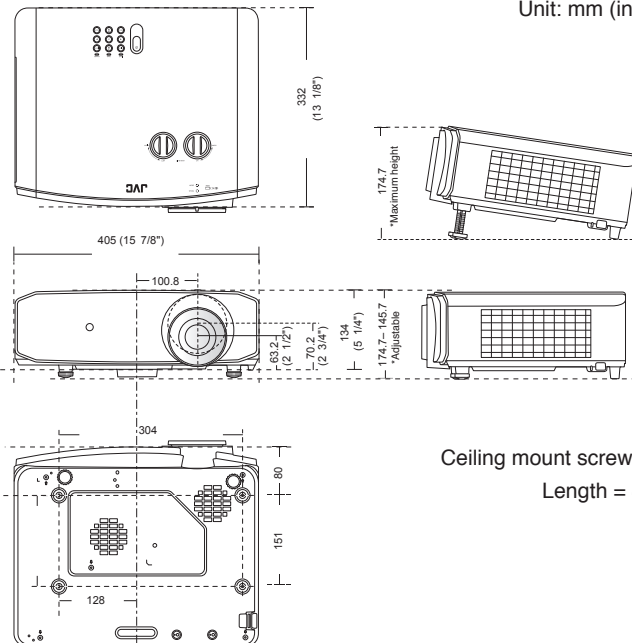

Key Features

BLUEScent Laser Phosphor Light Source

A Blue laser and a yellow phosphor panel replace the traditional projector lamp assembly. The benefits include 3,300 lumens brightness, 20,000 hours long life in the highest power laser setting, and laser dimming for infinite contrast.

2nd Generation .47" TRP DMD Device

DMD (digital micromirror device) is a digitally controlled micro-opto-electromechanical system (MOEMS) spatial light modulator (SLM). When coupled to an appropriate optical system, the DMD displays a very crisp, high resolution image or video.

1080p/ 240Hz

Advanced Gaming Capabilities

The LX-NZ30 impresses with 1080p240Hz support and 6.25ms low latency. DisplayPort 1.2 connection is ideal for gaming PC's, while warping adds flexibility for use with curved projection screens.

Throw Distance

	Size of projected image				Throw Distance (16:9)			
	Height		Width		Wide		Tele	
Screen size Diagonal (inch)	inch	cm	inch	cm	inch	cm	inch	cm
95	47	118	83	210	112	285	180	456
100	49	125	87	221	118	300	189	480
120	59	149	105	266	142	360	227	576
150	74	187	131	332	177	450	283	720
180	88	224	157	398	213	540	340	864
200	98	249	174	443	236	600	378	960

Notice — Specifications subject to change without notice.

Copyright © 2023, JVCKENWOOD Corporation. All Rights Reserved.

JVCKENWOOD

jvc.com

Printed in the U.S.A.

"JVC" is the trademark or registered trademark of JVCKENWOOD Corporation.